TECH MEDIA COMPUTER SYSTEMS CORPORATION TIM-VAC (CAPTURE MEDIA)

Card Type Video/Sound Video Types Supported XVGA


Chipset Controller Media Computer Technologies, Inc. MVM121A

Highest Resolution Supported Unidentified
Data Bus Type 16-bit ISA
Memory Type VRAM

I/O Options Audio out, CD-ROM audio in, A/V connector, VESA feature connector,

VGA-in connector, TV tuner, video out

Maximum Onboard Memory 1MB

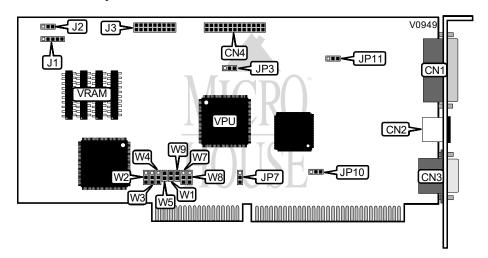

| CONNECTIONS | | | |
|------------------------|----------|-----------------|----------|
| Purpos : | Location | Purpos : | Location |
| A/V connector | CN1 | CD-ROM audio in | J1 |
| VGA-in connector | CN2 | Audio out | J2 |
| Video out | CN3 | TV tuner | J3 |
| VESA feature connector | CN4 | | |

| VIDEO SYSTEM SELECTION | | |
|------------------------|-------------------|--|
| Setting | JP11 | |
| SECAM | Pins 1 & 2 closed | |
| NTSC/PAL | Pins 2 & 3 closed | |

| VIDEO I/O ADDRESS SELECTION | | |
|-----------------------------|--------|--|
| Address | W1 | |
| 0B18h | Open | |
| 0B19h | Open | |
| 0B28h | Closed | |
| 0B29h | Closed | |

Continued next page...

TECH MEDIA COMPUTER SYSTEMS CORPORATION TIM-VAC (CAPTURE MEDIA)

. . . continued from previous page.

| VIDEO INTERRUPT SELECTION | | |
|---------------------------|-------------------|--|
| IRQ JP7 | | |
| 15 | Pins 1 & 2 closed | |
| 12 | Pins2 & 3 closed | |

| AUDIO I/O ADDRESS SELECTION | | |
|-----------------------------|--------|--|
| Address | W5 | |
| 534h | Closed | |
| 608h | Open | |

| AUDIO INTERRUPT SELECTION | | |
|---------------------------|-------------------|--|
| IRQ W4 | | |
| 11 | Pins 1 & 2 closed | |
| 10 | Pins2 & 3 closed | |

| | DMA SELECTION | |
|---------|-------------------|-------------------|
| Channel | W2 | W3 |
| 0 | Pins 1 & 2 closed | Pins 1 & 2 closed |
| 1 | Pins 2 & 3 closed | Pins 2 & 3 closed |

| ADDRESSING MODE CONFIGURATION | | | |
|-------------------------------|--------|-------------------|-------------------|
| Mode | W9 | W7 | W8 |
| Linear (≤8MB system RAM) | Closed | Pins 1 & 2 closed | Pins 1 & 2 closed |
| Paged (>8MB system RAM) | Open | Pins 2 & 3 closed | Pins 2 & 3 closed |

| FACTORY CONFIGURED - DO NOT ALTER | | |
|-----------------------------------|------|--|
| Jumper Position | | |
| JP3 Pins 1 & 2 closed | | |
| JP10 | Open | |