


WESTERN DIGITAL CORPORATION
PARADISE VGA PROFESSIONAL CARD

Category	Video
Video Types Supported	XVGA
Video Processor	WD PVGA1A
Highest Resolution Supported	800 x 600
Data Bus Type	16-bit ISA
Memory Type	VRAM
Maximum Onboard Memory	512KB

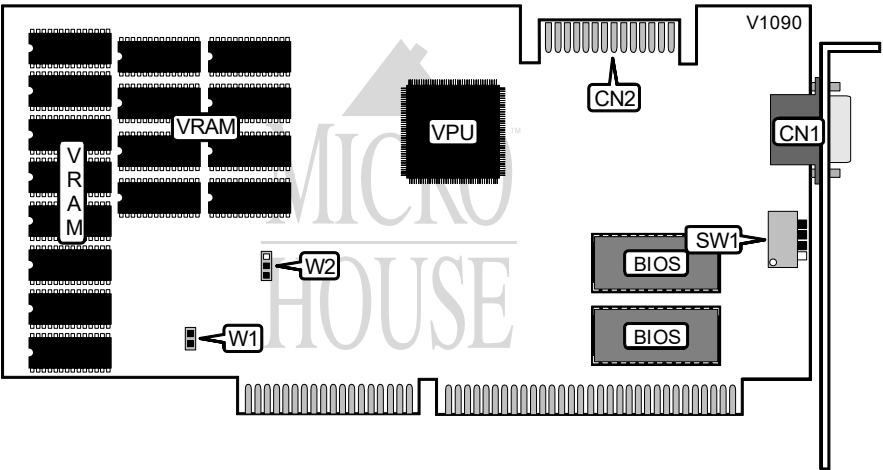

CONNECTIONS			
Purpose	Location	Location	Purpose
15-pin analog video port	CN1	VGA feature connector	CN2

MANUAL 16-BIT BIOS CONFIGURATION	
Setting	W1
Initial setup and normal operation	Closed
16TEST program	Open
Note: W1 should remain in the closed position unless the 16TEST program has been run and it recommends removing the jumper.	

FEATURE CONNECTOR CLOCK CONFIGURATION	
Setting	W2
Enabled	Pins 1 & 2 closed
Disabled	Pins 2 & 3 closed
Note: When enabled, the feature connector supports 800 x 600 graphics and 132 column text modes but it does not provide full support of all signals on the video feature connector.	

Continued on next page . . .

WESTERN DIGITAL CORPORATION
PARADISE VGA PROFESSIONAL CARD

VGA MODE SWITCHING IMPLEMENTATION	
Mode	SW1/2
i PS/2 style	On
PC/AT style	Off

AUTOSENSE CONFIGURATION	
Mode	SW1/4
i Enabled autosense for 16-bit BIOS	On
Autosense disabled, force 8-bit BIOS	Off

FACTORY CONFIGURED - DO NOT ALTER	
Switch	Position
SW1/3	Off