
## PROLINK COMPUTER, INC. PIXELVIEW-VIDEOCD MPEG/AVI

Card TypeVideo/SoundVideo Types SupportedVGAChipset ControllerUnidentifiedHighest Resolution SupportedN/AData Bus Type16-bit ISAMemory TypeDRAM

I/O Options Feature connector, speaker out/line out, VGA in, VGA out, video decoder

connector

Maximum Onboard Memory 1MB

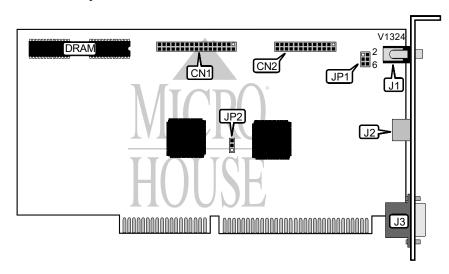

CONNECTIONS				
Purpos :	Location	Purpos :	Location	
Video decoder connector	CN1	6-pin VGA in	J2	
VESA feature connector	CN2	VGA out	J3	
Speaker out/line out	J1			

SPEAKER OUT/LINE OUT SELECTION		
Setting	JP1	
í Line out	Pins 3 & 5, 4 & 6 closed	
Speaker out	Pins 1 & 3, 2 & 4 closed	

VIDEO CD/TUNER CONFIGURATION		
Setting	JP2	
VideoCD + Tuner	Pins 2 & 3 closed	
VideoCD only	Pins 1 & 2 closed	
Note: Refer to Prolink Computer, Inc./Tuner Card (V1325).		