


# IBM CORPORATION

## EASY OPTIONS GAME & AUDIO CARD AC525

Card Type	Sound card
Chip Set	Unidentified
Maximum Onboard Memory	N/A
I/O Options	Game/MIDI port, microphone in, speaker, volume
Data Bus	8-bit ISA
Floppy drives supported	N/A

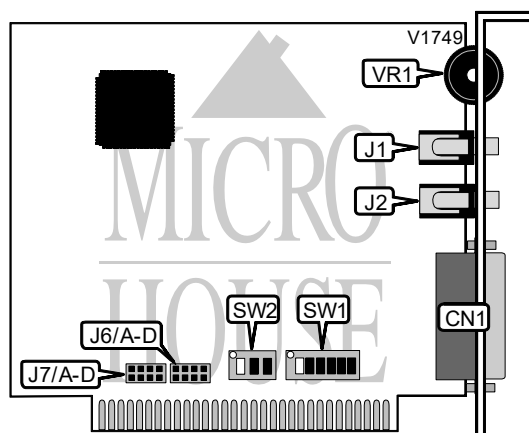

CONNECTIONS			
Function	Label	Function	Label
Game/MIDI port	CN1	Mic in	J2
Speaker	J1	Volume	VR1

USER CONFIGURABLE SETTINGS			
Function	Label	Position	
MIDI port disabled	SW 1/1	On	
MIDI port enabled	SW 1/1	Off	
í Factory configured - do not alter	SW 1/5	Unidentified	
Game port disabled	SW 1/6	On	
Game port enabled	SW 1/6	Off	
í Factory configured - do not alter	SW 2/1	Unidentified	

GAME/MIDI PORT INTERRUPT SELECTION				
IRQ	J6/A	J6/B	J6/C	J6/D
2	Closed	Open	Open	Open
3	Open	Closed	Open	Open
5	Open	Open	Closed	Open
í 7	Open	Open	Open	Closed

AUDIO INTERRUPT SELECTION				
IRQ	J7/A	J7/B	J7/C	J7/D
2	Closed	Open	Open	Open
3	Open	Closed	Open	Open
í 5	Open	Open	Closed	Open
7	Open	Open	Open	Closed

Continued on next page. . .

# IBM CORPORATION

## EASY OPTIONS GAME & AUDIO CARD AC525

. . . continued from previous page

DIGITAL AUDIO BASE I/O ADDRESS SELECTION			
Address	SW1/2	SW1/3	SW1/4
210h	On	On	Off
220h	Off	Off	Off
230h	On	Off	Off
240h	Off	On	On
250h	Off	On	Off
260h	Off	Off	On
Disabled	On	On	On

GAME/MIDI PORT BASE I/O ADDRESS SELECTION		
Address	SW2/2	SW2/3
300h	On	On
310h	Off	On
320h	On	Off
330h	Off	Off