
SUNIX CO., LTD. SUN-6308HT (EX-4031)

Card Type Serial card

Chipset Startech/ST16C550

Maximum Onboard Memory N/A

I/O Options Serial ports (2)
Data Bus 16-bit ISA
Floppy drives supported N/A

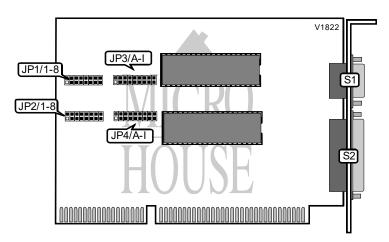

CONNECTIONS						
Function	Location	Function	Location			
9-pin serial port 1	S1	25-pin serial port 2	S2			

SERIAL PORT 1 ADDRESS SELECTION										
COM	JP1/1	JP1/2	JP1/3	JP1/4	JP1/5	JP1/6	JP1/7	JP1/8		
í COM1(3F8h)	Closed	Open								
COM2(2F8h)	Open	Closed	Open	Open	Open	Open	Open	Open		
COM3(3E8h)	Open	Open	Closed	Open	Open	Open	Open	Open		
COM4(2E8h)	Open	Open	Open	Closed	Open	Open	Open	Open		
COM5(3F0h)	Open	Open	Open	Open	Closed	Open	Open	Open		
COM6(3E0h)	Open	Open	Open	Closed	Open	Closed	Open	Open		
COM7(2E0h)	Open	Open	Open	Open	Open	Open	Closed	Open		
COM8(260h)	Open	Closed								

SERIAL PORT 2 ADDRESS SELECTION										
COM	JP2/1	JP2/2	JP2/3	JP2/4	JP2/5	JP2/6	JP2/7	JP2/8		
COM1(3F8h)	Closed	Open								
í COM2(2F8h)	Open	Closed	Open	Open	Open	Open	Open	Open		
COM3(3E8h)	Open	Open	Closed	Open	Open	Open	Open	Open		
COM4(2E8h)	Open	Open	Open	Closed	Open	Open	Open	Open		
COM5(3F0h)	Open	Open	Open	Open	Closed	Open	Open	Open		
COM6(3E0h)	Open	Open	Open	Closed	Open	Closed	Open	Open		
COM7(2E0h)	Open	Open	Open	Open	Open	Open	Closed	Open		
COM8(260h)	Open	Closed								

Continued on next page. . .

SUNIX CO., LTD. SUN-6308HT (EX-4031)

. . .continued from previous page

SERIAL PORT 1 INTERRUPT SELECTION										
IRQ	JP3/A	JP3/B	JP3/C	JP3/D	JP3/E	JP3/F	JP3/G	JP3/H	JP3/I	
IRQ3	Closed	Open								
í IRQ4	Open	Closed	Open							
IRQ5	Open	Open	Closed	Open	Open	Open	Open	Open	Open	
IRQ7	Open	Open	Open	Closed	Open	Open	Open	Open	Open	
IRQ9	Open	Open	Open	Open	Closed	Open	Open	Open	Open	
IRQ10	Open	Open	Open	Open	Open	Closed	Open	Open	Open	
IRQ11	Open	Open	Open	Open	Open	Open	Closed	Open	Open	
IRQ12	Open	Closed	Open							
IRQ15	Open	Closed								

SERIAL PORT 2 INTERRUPT SELECTION										
IRQ	JP4/A	JP4/B	JP4/C	JP4/D	JP4/E	JP4/F	JP4/G	JP4/H	JP4/I	
í IRQ3	Closed	Open								
IRQ4	Open	Closed	Open							
IRQ5	Open	Open	Closed	Open	Open	Open	Open	Open	Open	
IRQ7	Open	Open	Open	Closed	Open	Open	Open	Open	Open	
IRQ9	Open	Open	Open	Open	Closed	Open	Open	Open	Open	
IRQ10	Open	Open	Open	Open	Open	Closed	Open	Open	Open	
IRQ11	Open	Open	Open	Open	Open	Open	Closed	Open	Open	
IRQ12	Open	Closed	Open							
IRQ15	Open	Closed								