


MOTOROLA, INC.

6520/6560 MPROUTER SERIAL DATA BOARD 2

Card Type	Serial
Processor	Motorola 68360
Processor Speed	Unidentified
Chip Set	Unidentified
I/O Options	Serial ports (2)
Data Bus	16-bit ISA

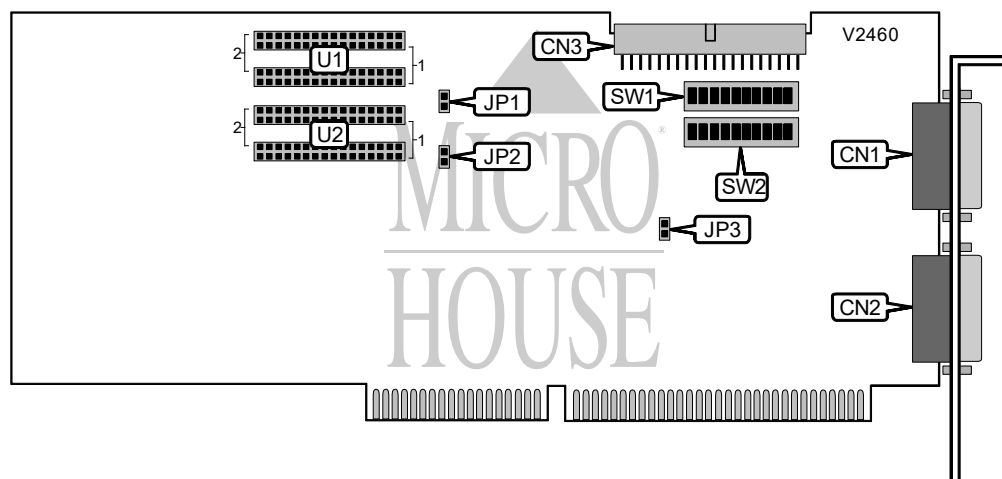

CONNECTIONS			
Function	Label	Function	Label
V.11, V.24, V.35, or V.36 port 1	CN1	Unidentified	CN3
V.11, V.24, V.35, or V.36 port 2	CN2		

USER CONFIGURABLE SETTINGS		
Function	Label	Position
í Factory configured - do not alter	JP1	Unidentified
í Factory configured - do not alter	JP2	Unidentified
í Factory configured - do not alter	JP3	Unidentified
í Ring Indicator for port 1 enabled	SW1/9	On
Ring Indicator for port 1 disabled	SW1/9	Off
í Busy out for port 1 enabled	SW1/10	On
Busy out for port 1 disabled	SW1/10	Off
í Ring Indicator for port 2 enabled	SW2/9	On
Ring Indicator for port 2 disabled	SW2/9	Off
í Busy out for port 2 enabled	SW2/10	On
Busy out for port 2 disabled	SW2/10	Off

Continued on next page. . .

MOTOROLA, INC.

6520/6560 MPRouter SERIAL DATA BOARD 2

... continued from previous page

PORT 1 TYPE						
Setting	SW1/1	SW1/2	SW1/3	SW1/4	SW1/5	SW1/6
V.11 DTE	Off	Off	Off	Off	Off	On
V.11 DCE	Off	Off	Off	Off	Off	On
V.24 DTE	On	On	On	On	On	Off
V.24 DCE	On	On	On	On	On	Off
V.35 DTE	Off	Off	Off	Off	Off	On
V.35 DCE	Off	Off	Off	Off	Off	On
V.36 DTE	Off	Off	Off	Off	Off	On
V.36 DCE	Off	Off	Off	Off	Off	On

PORT 1 TYPE (CON'T)			
Setting	SW1/7	SW1/8	U1
V.11 DTE	On	On	V.11 module in position 1
V.11 DCE	On	On	V.11 module in position 2
V.24 DTE	Off	Off	V.24 module in position 1
V.24 DCE	Off	Off	V.24 module in position 2
V.35 DTE	On	On	V.35 module in position 1
V.35 DCE	On	On	V.35 module in position 2
V.36 DTE	On	On	V.36 module in position 1
V.36 DCE	On	On	V.36 module in position 2

PORT 2 TYPE						
Setting	SW2/1	SW2/2	SW2/3	SW2/4	SW2/5	SW2/6
V.11 DTE	Off	Off	Off	Off	Off	On
V.11 DCE	Off	Off	Off	Off	Off	On
V.24 DTE	On	On	On	On	On	Off
V.24 DCE	On	On	On	On	On	Off
V.35 DTE	Off	Off	Off	Off	Off	On
V.35 DCE	Off	Off	Off	Off	Off	On
V.36 DTE	Off	Off	Off	Off	Off	On
V.36 DCE	Off	Off	Off	Off	Off	On

PORT 2 TYPE (CON'T)			
Setting	SW2/7	SW2/8	U2
V.11 DTE	On	On	V.11 module in position 1
V.11 DCE	On	On	V.11 module in position 2
V.24 DTE	Off	Off	V.24 module in position 1
V.24 DCE	Off	Off	V.24 module in position 2
V.35 DTE	On	On	V.35 module in position 1
V.35 DCE	On	On	V.35 module in position 2
V.36 DTE	On	On	V.36 module in position 1
V.36 DCE	On	On	V.36 module in position 2

MISCELLANEOUS TECHNICAL NOTE

This card is designed for use in Motorola's 6520/6560 MPRouter system and will not function in another system. See documents M3596 and M3597 for more information.