


INTEL CORPORATION

ABOVE BOARD/AT

Card Type	Memory card
Chip Set	Unidentified
Maximum Onboard Memory	2048KB DRAM
I/O Options	None
Data Bus	16-bit ISA
Floppy drives supported	None

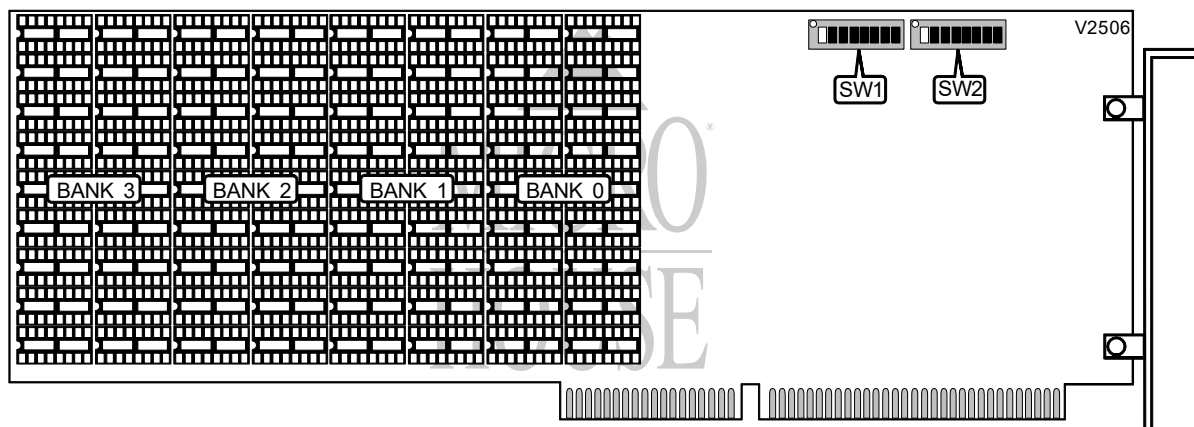

USER CONFIGURABLE SETTINGS		
Function	Label	Position
i Factory configured - do not alter	SW2/2	N/A

DRAM CONFIGURATION				
Size	Bank 0	Bank 1	Bank 2	Bank 3
128KB	(18) 64K x 1	None	None	None
256KB	(18) 64K x 1	(18) 64K x 1	None	None
384KB	(18) 64K x 1	(18) 64K x 1	(18) 64K x 1	None
512KB	(18) 64K x 1	(18) 64K x 1	(18) 64K x 1	(18) 64K x 1
512KB	(18) 256K x 1	None	None	None
1024KB	(18) 256K x 1	(18) 256K x 1	None	None
1536KB	(18) 256K x 1	(18) 256K x 1	(18) 256K x 1	None
1664KB	(18) 64K x 1	(18) 256K x 1	(18) 256K x 1	(18) 256K x 1
2048KB	(18) 256K x 1	(18) 256K x 1	(18) 256K x 1	(18) 256K x 1

Continued on next page. . .

INTEL CORPORATION

ABOVE BOARD/AT

. . . continued from previous page

EXTENDED MEMORY CONFIGURATION								
Size	SW1/1	SW1/2	SW1/3	SW1/4	SW1/5	SW1/6	SW1/7	SW1/8
None	Off	Off	Off	Off	Off	Off	Off	Off
1MB	N/A	N/A	N/A	N/A	On	On	Off	On
1.5MB	On	On	Off	Off	On	On	Off	Off
2MB	On	Off	On	On	On	Off	On	On
2.5MB	On	Off	On	Off	On	Off	On	Off
3MB	On	Off	Off	On	On	Off	Off	On
3.5MB	On	Off	Off	Off	On	Off	Off	Off
4MB	Off	On	On	On	Off	On	On	On
4.5MB	Off	On	On	Off	Off	On	On	Off
5MB	Off	On	Off	On	Off	On	Off	On
5.5MB	Off	On	Off	Off	Off	On	Off	Off
6MB	Off	Off	On	On	Off	Off	On	On
6.5MB	Off	Off	On	Off	Off	Off	On	Off
7MB	Off	Off	Off	On	Off	Off	Off	On
7.5MB	Off	Off	Off	Off	N/A	N/A	N/A	N/A

MEMORY CHIP TYPE SELECTION	
Type	SW2/1
64KB	Off
256KB	On
Both	On

CONVENTIONAL MEMORY SELECTION		
Memory	SW2/3	SW2/4
128KB	On	On
512KB through 640KB	On	On
None	Off	Off

BASE I/O ADDRESS SELECTION				
Setting	SW2/5	SW2/6	SW2/7	SW2/8
258h - 25Fh	On	Off	On	Off
268h - 26Fh	On	Off	Off	On
208h - 20Fh	On	On	On	On
218h - 21Fh	On	On	On	Off
2A8h - 2AFh	Off	On	Off	On
2B8h - 2BFh	Off	On	Off	Off
2E8h - 2EFh	Off	Off	Off	On