


EMULEX CORPORATION

MEGA MEMORY MODULE

Card Type	Memory card
Chip Set	Unidentified
Maximum Onboard Memory	3MB DRAM
I/O Options	None
Data Bus	16-bit ISA
Floppy drives supported	None

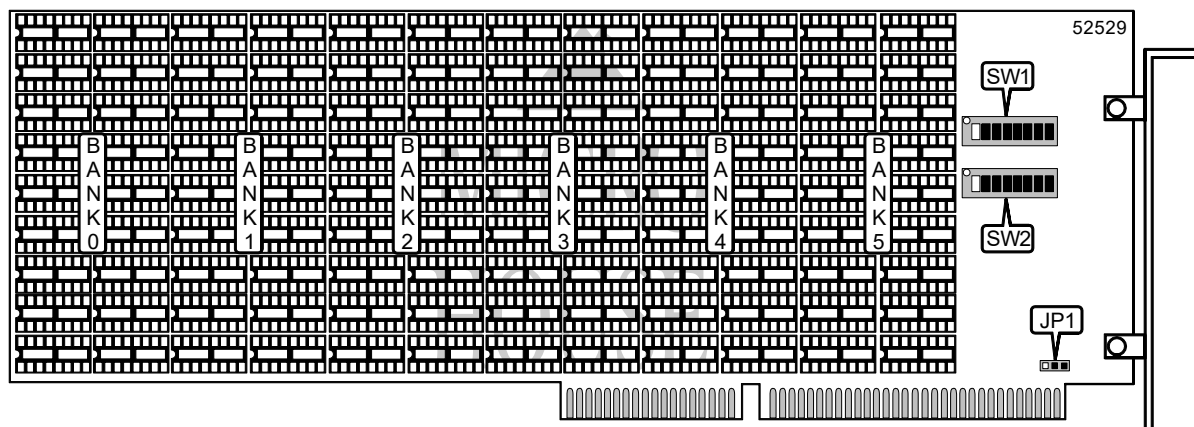

USER CONFIGURABLE SETTINGS			
Function	Label	Position	
Parity enabled	JP1	Pins 1 & 2 closed	
Parity disabled	JP1	Pins 2 & 3 closed	
i Factory configured - do not alter	SW1/6	Off	
i Factory configured - do not alter	SW1/7	Off	
i Factory configured - do not alter	SW1/8	Off	
i Factory configured - do not alter	SW2/8	Off	

DRAM CONFIGURATION			
Size	Bank 0	Bank 1	Bank 2
128KB	(18) 4164	None	None
256KB	(18) 4164	(18) 4164	None
384KB	(18) 4164	(18) 4164	(18) 4164
512KB	(18) 4164	(18) 4164	(18) 4164
640KB	(18) 4164	(18) 4164	(18) 4164
768KB	(18) 4164	(18) 4164	(18) 4164
512KB	(18) 41256	None	None
1024KB	(18) 41256	(18) 41256	None
1536KB	(18) 41256	(18) 41256	(18) 41256
2048KB	(18) 41256	(18) 41256	(18) 41256
2560KB	(18) 41256	(18) 41256	(18) 41256
3072KB	(18) 41256	(18) 41256	(18) 41256

Continued on next page. . .

EMULEX CORPORATION

MEGA MEMORY MODULE

. . . continued from previous page

DRAM CONFIGURATION (CON'T)			
Size	Bank 3	Bank 4	Bank 5
128KB	None	None	None
256KB	None	None	None
384KB	None	None	None
512KB	(18) 4164	None	None
640KB	(18) 4164	(18) 4164	None
768KB	(18) 4164	(18) 4164	(18) 4164
512KB	None	None	None
1024KB	None	None	None
1536KB	None	None	None
2048KB	(18) 41256	None	None
2560KB	(18) 41256	(18) 41256	None
3072KB	(18) 41256	(18) 41256	(18) 41256

BASE MEMORY SELECTION		
Size	SW1/1	SW1/2
None	Off	Off
128KB	On	Off
256KB	Off	On
384KB	On	On

EXTENDED MEMORY SELECTION			
Size	SW1/3	SW1/4	SW1/5
None	Off	Off	Off
512KB	Off	On	Off
1024KB	On	On	Off
1536KB	Off	Off	On
2048KB	On	Off	On
2560KB	Off	On	On
3072KB	On	On	On

BASE MEMORY ADDRESS SELECTION		
Size	SW2/1	SW2/2
None	Off	Off
256KB	On	Off
384KB	Off	On
512KB	On	On

Continued on next page. . .

EMULEX CORPORATION

MEGA MEMORY MODULE

. . . continued from previous page

EXTENDED MEMORY ADDRESS SELECTION					
Size	SW2/3	SW2/4	SW2/5	SW2/6	SW2/7
1MB	On	Off	Off	Off	Off
1.5MB	Off	On	Off	Off	Off
2MB	On	On	Off	Off	Off
2.5MB	Off	Off	On	Off	Off
3MB	On	Off	On	Off	Off
3.5MB	Off	On	On	Off	Off
4MB	On	On	On	Off	Off
4.5MB	Off	Off	Off	On	Off
5MB	On	Off	Off	On	Off
5.5MB	Off	On	Off	On	Off
6MB	On	On	Off	On	Off
6.5MB	Off	Off	On	On	Off
7MB	On	Off	On	On	Off
7.5MB	Off	On	On	On	Off
8MB	On	On	On	On	Off
8.5MB	Off	Off	Off	Off	On
9MB	On	Off	Off	Off	On
9.5MB	Off	On	Off	Off	On
10MB	On	On	Off	Off	On
10.5MB	Off	Off	On	Off	On
11MB	On	Off	On	Off	On
11.5MB	Off	On	On	Off	On
12MB	On	On	On	Off	On
12.5MB	Off	Off	Off	On	On
13MB	On	Off	Off	On	On
13.5MB	Off	On	Off	On	On
14MB	On	On	Off	On	On
14.5MB	Off	Off	On	On	On
15MB	On	Off	On	On	On
None	On	On	On	On	On