


AST RESEARCH, INC. MEGAPLUS II

Card Type	Multi-I/O card
Chip Set	8250
Maximum Onboard Memory	Unidentified
I/O Options	Parallel port, serial port, DTE connector, DCE connector, 62-pin connector
Data Bus	8-bit ISA
Floppy drives supported	None

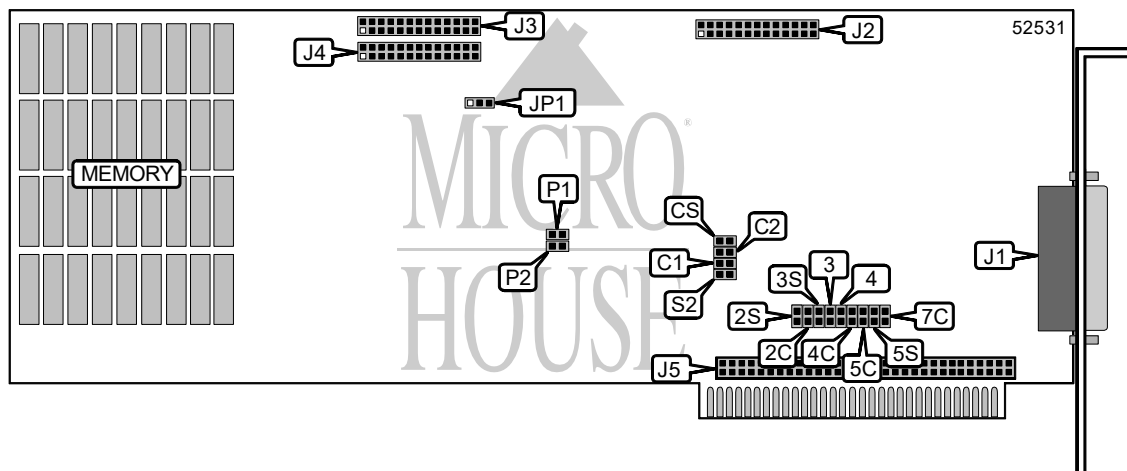

CONNECTIONS			
Function	Label	Function	Label
Parallel port	J1	DCE connector	J4
Parallel printer port	J2	62-pin connector	J5
DTE connector	J3		

USER CONFIGURABLE SETTINGS		
Function	Label	Position
Factory configured - do not alter	C1	Unidentified
Factory configured - do not alter	C2	Unidentified
Factory configured - do not alter	CS	Unidentified
DTE enabled	JP1	Pins 2 & 3 closed
DCE enabled	JP1	Pins 1 & 2 closed
Factory configured - do not alter	P1	Unidentified
Factory configured - do not alter	P2	Unidentified
Serial port enabled	S2	Closed
Serial port disabled	S2	Open

Continued on next page. . .

AST RESEARCH, INC.
MEGAPLUS II

... continued from previous page

[illegible]

RAM CONFIGURATION

Note: The size and configuration of the memory is unidentified