


COMPUDYNE BOOMBOARD

Card Type
Chip Set
Maximum Onboard Memory
I/O Options
Data Bus

Sound card
Unidentified
None
Volume, audio in, audio out, Game port
8-bit ISA

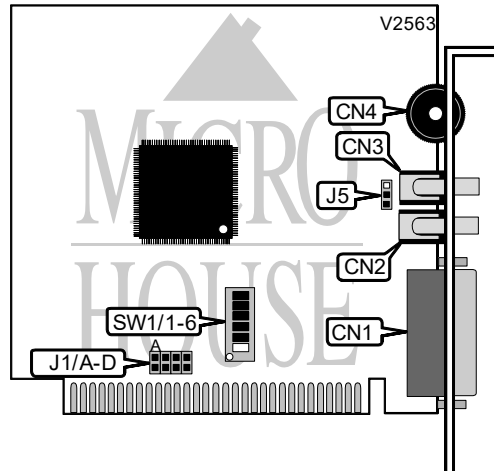

CONNECTIONS			
Function	Label	Function	Label
Joystick port	CN1	Volume	CN4
Audio in	CN2	Pro AudiSpectrum connector	J5
Audio out	CN3		

USER CONFIGURABLE SETTINGS		
Function	Label	Position
FM synthesizer enabled	SW 1/4	On
FM synthesizer disabled	SW 1/4	Off
Game port enabled	SW 1/5	On
Game port disabled	SW 1/5	Off
Audio compression enabled	SW 1/6	On
Audio compression disabled	SW 1/6	Off

BASE I/O ADDRESS SELECTION			
Setting	SW 1/1	SW 1/2	SW 1/3
\$210 - \$21F	Off	On	On
\$220 - \$22F	On	Off	On
\$230 - \$23F	Off	Off	On
\$240 - \$24F	On	On	Off
\$250 - \$25F	Off	On	Off
\$260 - \$26F	Off	Off	Off

INTERRUPT SELECTION				
IRQ	J1/A	J1/B	J1/C	J1/D
2	Closed	Open	Open	Open
3	Open	Closed	Open	Open
5	Open	Open	Closed	
7	Open	Open	Open	Closed