


SIIG, INC.

PARALLEL PRO DUAL

Card Type
Chip Set
I/O Options
Data Bus

Parallel card
Unidentified
Parallel ports (2)
16-bit ISA

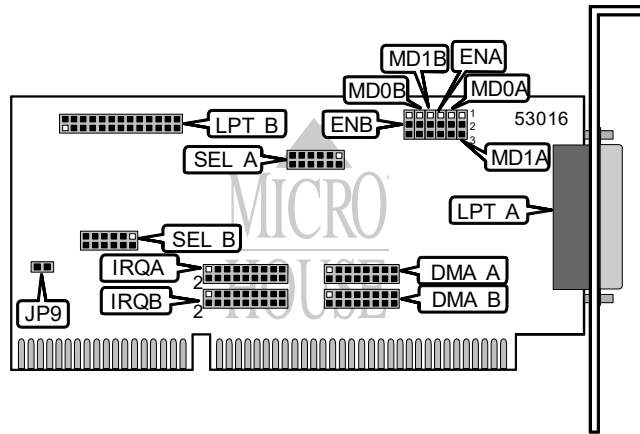

CONNECTIONS			
Function	Label	Function	Label
Parallel port A	LPT A	Parallel port B	LPT B

USER CONFIGURABLE SETTINGS			
Function	Label	Position	
Parallel pro dual enabled port A	ENA	Pins 1 & 2 closed	
Parallel pro dual disabled port A	ENA	Pins 2 & 3 closed	
Parallel pro dual enabled port B	ENB	Pins 1 & 2 closed	
Parallel pro dual disabled port B	ENB	Pins 2 & 3 closed	
Factory configured - do not alter	JP9	Unidentified	

MODE CONFIGURATION PORT A			
Mode	MD0A	MD1A	
SPP/BPP	Pins 1 & 2 closed	Pins 1 & 2 closed	
EPP	Pins 2 & 3 closed	Pins 1 & 2 closed	
ECP	Pins 1 & 2 closed	Pins 2 & 3 closed	
ECP/EPP	Pins 2 & 3 closed	Pins 2 & 3 closed	

MODE CONFIGURATION PORT B			
Mode	MD0B	MD1B	
SPP/BPP	Pins 1 & 2 closed	Pins 1 & 2 closed	
EPP	Pins 2 & 3 closed	Pins 1 & 2 closed	
ECP	Pins 1 & 2 closed	Pins 2 & 3 closed	
ECP/EPP	Pins 2 & 3 closed	Pins 2 & 3 closed	

Continued on next page . . .

SIIG, INC. PARALLEL PRO DUAL

...continued from previous page

DMA SELECTION PORT A	
Setting	DMA A
DMA 0	Pins 1 & 2, 3 & 4 closed
DMA 1	Pins 5 & 6, 7 & 8 closed
DMA 2	Pins 9 & 10, 11 & 12 closed
í DMA 3	Pins 13 & 14, 15 & 16 closed

DMA SELECTION PORT B	
Setting	DMA B
DMA 0	Pins 1 & 2, 3 & 4 closed
í DMA 1	Pins 5 & 6, 7 & 8 closed
DMA 2	Pins 9 & 10, 11 & 12 closed
DMA 3	Pins 13 & 14, 15 & 16 closed

BASE I/O ADDRESS SELECTION PORT A	
Address	SEL A
3BCh	Pins 1 & 2 closed
í 378h	Pins 3 & 4 closed
278h	Pins 5 & 6 closed
268h	Pins 7 & 8 closed
280h	Pins 9 & 10 closed
288h	Pins 11 & 12 closed

BASE I/O ADDRESS SELECTION PORT B	
Address	SEL B
3BCh	Pins 1 & 2 closed
378h	Pins 3 & 4 closed
í 278h	Pins 5 & 6 closed
268h	Pins 7 & 8 closed
280h	Pins 9 & 10 closed
288h	Pins 11 & 12 closed

PARALLEL PORT A INTERRUPT SELECTION	
IRQ	IRQA/1-18
9	Pins 1 & 2 closed
3	Pins 3 & 4 closed
4	Pins 5 & 6 closed
5	Pins 7 & 8 closed
í 7	Pins 9 & 10 closed
10	Pins 11 & 12 closed
11	Pins 13 & 14 closed
12	Pins 15 & 16 closed
15	Pins 17 & 18 closed

Continued on next page . . .

SIIG, INC.

PARALLEL PRO DUAL

...continued from previous page

PARALLEL PORT B INTERRUPT SELECTION	
IRQ	IRQB/1-18
9	Pins 1 & 2 closed
3	Pins 3 & 4 closed
4	Pins 5 & 6 closed
5	Pins 7 & 8 closed
7	Pins 9 & 10 closed
10	Pins 11 & 12 closed
11	Pins 13 & 14 closed
12	Pins 15 & 16 closed
15	Pins 17 & 18 closed