

# SIMA TECHNOLOGY CO., LTD.

## MS1868PNP-T

Card Type  
Chip Set  
Maximum Onboard Memory  
I/O Options


Data Bus

Sound card

ESS

None

CD ROM Audio in (3), IDE CD-ROM interface, Line in , Microphone In,  
MIDI/Game port, Speaker out, Wavetable,  
16-bit ISA

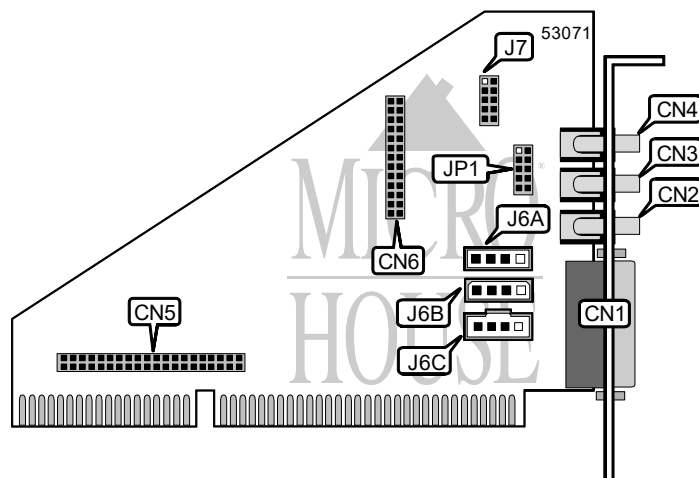

CONNECTIONS			
Function	Label	Function	Label
Game/MIDI port	CN1	CD Audio in Mitsumi	J6A
Microphone in	CN2	CD Audio in Panasonic	J6B
Line in	CN3	CD Audio in Sony	J6C
speaker out	CN4	SRS 3-D Sound Module	J7
IDE CD ROM interface	CN5		
Wavetable	CN6		

Note: The orientation of the 3 CD Audio connectors are unidentified.

SPEAKER OUT/LINE OUT SELECTION	
Function	JP1
Speaker out	Pins 7 & 9, 8 & 10 closed
Line out without SRS 3-D sound	Pins 3 & 5, 4 & 6 closed
Line out with SRS 3-D sound	Pins 1 & 3, 2 & 4 closed

USER CONFIGURABLE SETTINGS		
Function	Label	Position
SRS 3-D surround sound disabled	Unidentified	Low position
SRS 3-D surround sound enabled	Unidentified	Long position

Note: The SRS 3-D surround sound enable/disable button is located on the surround sound module.  
Low and Long positions are unidentified.