


IBM CORPORATION WIN/TV

Card Type	Video/TV card, Tuner card
Video Chip Set	Unidentified
Maximum Video Memory	Unidentified
Video Types Supported	VGA
Highest Resolution Supported	Unidentified
Data Bus	16-bit ISA

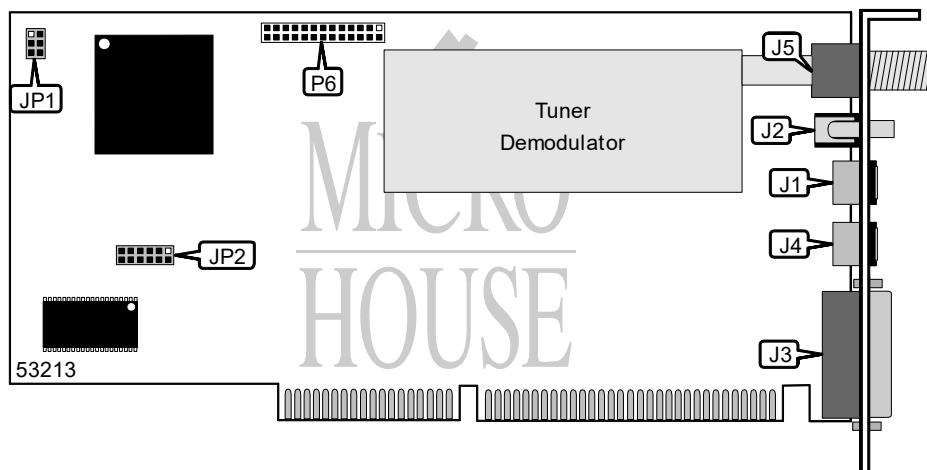

CONNECTIONS			
Function	Label	Function	Label
VGA Loop cable connector (mini DIN)	J1	75ohm coaxial connector	J5
Speaker/Line out	J2	Feature connector	P6
15-pin analog video port	J3	Audio out (to sound adapter card)	P7
Audio/Video in (S-Video)	J4		
Note: Location of P7 unidentified			

DRAM CONFIGURATION
Note: Location and configuration of DRAM unidentified

BASE I/O ADDRESS SELECTION (JP1)			
Address	Pin 1-2	Pin 3-4	Pin 5-6
500h	Closed	Closed	Closed
520h	Closed	Closed	Open
540h	Closed	Open	Closed
560h	Closed	Open	Open
580h	Open	Closed	Closed
5A0h	Open	Closed	Open
5C0h	Open	Open	Closed
5E0h	Open	Open	Open

IRQ SELECT (JP2)						
IRQ Setting	Pin 1-2	Pin 3-4	Pin 5-6	Pin 7-8	Pin 9-10	Pin 11-12
IRQ 5	Closed	Open	Open	Open	Open	Open
IRQ 7	Open	Closed	Open	Open	Open	Open
IRQ 10	Open	Open	Closed	Open	Open	Open
IRQ 11	Open	Open	Open	Closed	Open	Open
IRQ 12	Open	Open	Open	Open	Closed	Open
IRQ 15	Open	Open	Open	Open	Open	Closed