
## MEDIA VISION TECHNOLOGY, INC. PRO AUDIO SPECTRUM 16 REV.D (650-0097-05)

Card Type Sound card
Chip Set Unidentified
Maximum Onboard Memory Unidentified

I/O Options Game/MIDI port, CD-ROM audio in , SCSI interface, microphone in,

stereo line in, stereo line out

Data Bus 16-bit ISA

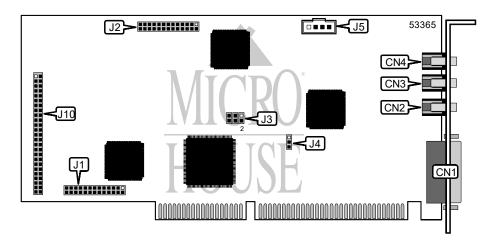

CONNECTIONS					
Function	Label	Function	Label		
Game/MIDI port	CN1	Unidentified	J1		
Microphone in	CN2	Unidentified	J2		
Stereo line out	CN3	Audio in - CD-ROM	J5		
Stereo line in	CN4	50-pin SCSI connector	J10		

USER CONFIGURABLE SETTINGS					
Function	Label	Position			
í DMA sharing - disabled	J4	Pins 2 & 3 closed			
DMA sharing - enabled	J4	Pins 1 & 2 closed			

BOARD ID SELECTION					
Setting	J3/pins 1 & 2	J3/pins 3 & 4	J3/pins 5 & 6		
í O	Open	Open	Open		
1	Closed	Open	Open		
2	Open	Closed	Open		
3	Closed	Closed	Open		
4	Open	Open	Closed		

Note: When ID 4 is selected, the base I/O address is forced to 388h. For all other ID's the software scans for available settings. Refer to the manufacturer's documentation for possible settings.