


3COM CORPORATION

IMPACT (3C861, 3C862)

Card Type	ISDN TA
Processor	Motorola 68302
Processor Speed	20MHz
Chip Set	Siemens 2081
Maximum Onboard Memory	1MB DRAM
Transfer Rate	56Kbps x 2/64Kbps x 2
Data Bus	16-bit ISA
ISDN Protocol	V.120, PPP
Switch Type	5ESS, DMS100, EWSD, NI-1
Error Correction/Compression	STAC
Card Size	Full-height, full-length

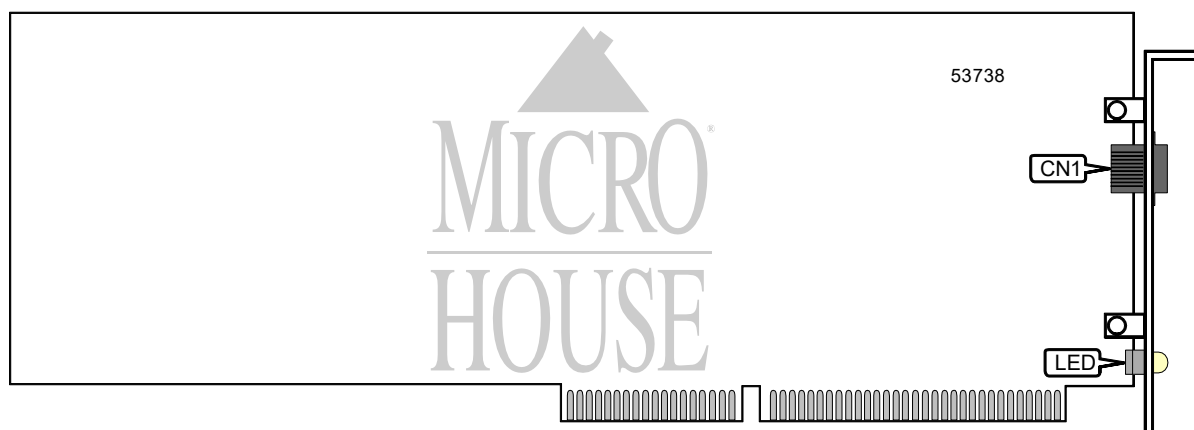

CONNECTIONS	
Function	Label
ISDN interface	CN1

USER CONFIGURABLE SETTINGS
All jumpers on the card are factory configured and should not be altered.

DIAGNOSTIC LED(S)			
LED	Color	Status	Condition
LED	Unidentified	On	ISDN connection is good
LED	Unidentified	Off	ISDN connection is broken