
## OLIVETTI MEM2852 MEMORY EXPANSION BOARD

Card Type Memory card

Maximum Onboard Memory2MBData Bus16-bit ISA

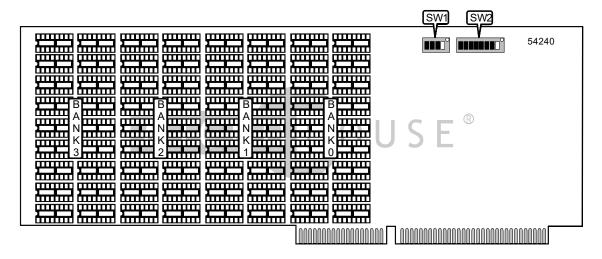

USER CONFIGURABLE SETTINGS					
Function	Label	Position			
í Factory configured - do not alter	SW1/1	Unidentified			
í Factory configured - do not alter	SW1/2	On			
í Factory configured - do not alter	SW1/3	Off			
í Factory configured - do not alter	SW1/4	Off			

DRAM CONFIGURATION							
Note: Board accepts a maximum of 2MB memory.	The configuration and chip size is unidentified.						

DRAM SWITCH CONFIGURATION (512KB SYSTEM)								
Memory boards installed	SW2/1	SW2/2	SW2/3	SW2/4	SW2/5	SW2/6	SW2/7	SW2/8
1	On	On	On	Off	On	On	On	Off
2	On	On	On	Off	Off	On	On	Off
3	On	On	On	Off	On	Off	On	Off

DRAM SWITCH CONFIGURATION (1MB SYSTEM)								
Memory boards installed	SW2/1	SW2/2	SW2/3	SW2/4	SW2/5	SW2/6	SW2/7	SW2/8
1	Off	Off	On	Off	On	On	On	Off
2	Off	Off	On	Off	Off	On	On	Off
3	Off	Off	On	Off	On	Off	On	Off