


ACER, INC. S711

Card Type	Sound card
Chip Set	Unidentified
Maximum Onboard Memory	None
I/O Options	Line ins (2), microphone ins (2), line out, game/MIDI port, audio in - CD-ROMs (3), wavetable connector, speaker/line out
Data Bus	16-bit ISA

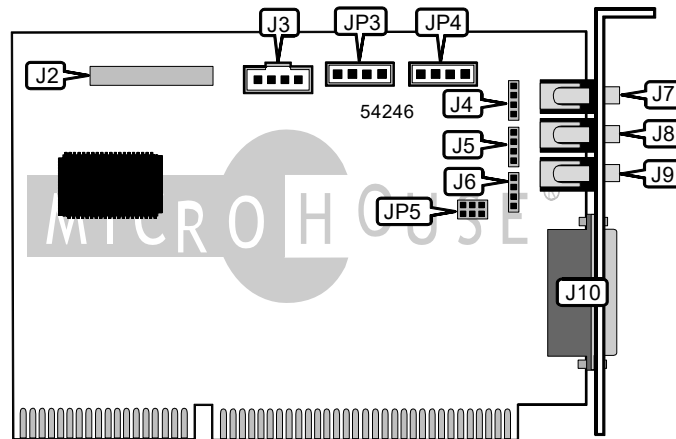

CONNECTIONS			
Function	Label	Function	Label
Wavetable connector	J2	Microphone in (external)	J8
Audio in - CD-ROM (Sony)	J3	Speaker/line out	J9
Line in (internal)	J4	Game/MIDI port	J10
Microphone in (internal)	J5	Audio in - CD-ROM (Creative)	JP3
Line out (internal)	J6	Audio in - CD-ROM (Mitsumi)	JP4
Line in (external)	J7		

USER CONFIGURABLE SETTINGS			
Function	Label	Position	
Speaker out enabled	JP5	Pins 3 & 5, 4 & 6 closed	
Line out enabled	JP5	Pins 1 & 3, 2 & 4 closed	