


KOUWELL ELECTRONIC CORPORATION

KW-508-E

Card Type
 Chip Set
 Maximum Onboard Memory
 I/O Options
 Data Bus

Parallel card
 Motorola
 Unidentified
 Parallel port
 8-bit ISA

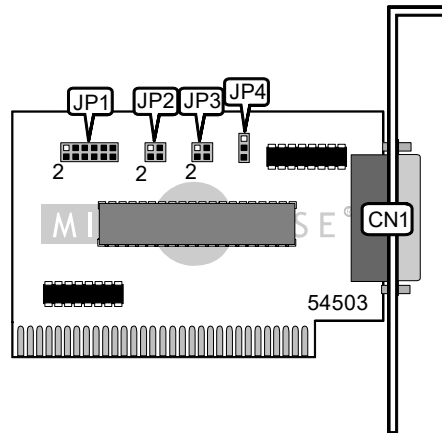

CONNECTIONS	
Function	Label
Parallel port	CN1

USER CONFIGURABLE SETTINGS		
Function	Label	Position
Printer type standard	JP4	Pins 2 & 3 closed
Printer type non-standard	JP4	Pins 1 & 2 closed

PARALLEL PORT ADDRESS SELECTION		
Setting	Label	Position
LPT1 (378h)	JP1	Pins 1 & 2 closed
LPT2 (278h)	JP1	Pins 3 & 4 closed
LPT3 (3BCh)	JP1	Pins 5 & 6 closed
LPT4 (258h)	JP1	Pins 7 & 8 closed
LPT5 (27Ch)	JP1	Pins 9 & 10 closed
LPT6 (26Ch)	JP1	Pins 11 & 12 closed

PARALLEL PORT INTERRUPT SELECTION		
IRQ	Label	Position
IRQ7	JP2	Pins 1 & 2 closed
IRQ5	JP2	Pins 3 & 4 closed

PARALLEL PORT MODE SELECTION		
Setting	Label	Position
Uni-directional	JP3	Pins 1 & 2 closed
Bi-Directional (EPP/ECP)	JP3	Pins 3 & 4 closed