


ZOOM TELEPHONICS, INC.

FAXMODEM A F C

Modem Type Data(Synchronous/Asynchronous)/Fax
Data Rate 2400bps
Fax Rate 9600bps
Data Bus 8-bit ISA
Fax Class Class I
Data Modulation Protocol Bell 103A & 212A, CCITT V.22 & V.22bis
Fax Modulation Protocol CCITT V.27ter & V.29
Error Correction/Compression V.42, MNP2-4/V.42bis, MNP5

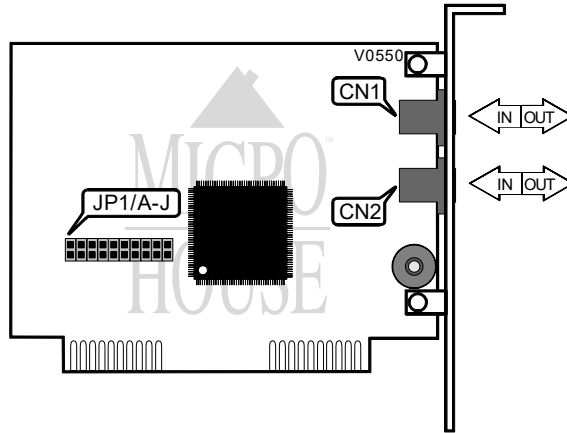

CONNECTIONS			
Purpose	Location	Purpose	Location
Line in or line out	CN1	Line in or line out	CN2

COM PORT SETTINGS				
COM/Address	JP1/A	JP1/B	JP1/C	JP1/D
COM4/2E8h	Open	Closed	Open	Closed
COM1/3F8h	Closed	Open	Closed	Open
COM2/2F8h	Closed	Open	Open	Closed
COM3/3E8h	Open	Closed	Closed	Open

INTERRUPT SELECTION				
IRQ	JP1/E	JP1/F	JP1/G	JP1/H
IRQ3	Open	Closed	Open	Open
IRQ2	Open	Open	Open	Closed
IRQ4	Closed	Open	Open	Open
IRQ5	Open	Open	Closed	Open

ZERO WAIT STATE		
Setting	JP1/I	JP1/J
Enabled	Closed	Open
Disabled	Open	Closed