


SUPRA DIAMOND

SUPRAFAX MODEM 24/96

Card Type	Fax, Modem (asynchronous)
Chip Set	Rockwell
Maximum Data Rate	2400bps
Maximum Fax Rate	9600bps
Data Bus	8-bit ISA
Fax Class	Class I
Data Modulation Protocol	Bell 103/212A
	ITU-T V.21, V.22, V.22bis
Fax Modulation Protocol	ITU-T V.21CH2, V.27ter, V.29
Error	MNP5, V.42, V.42bis
Correction/Compression	

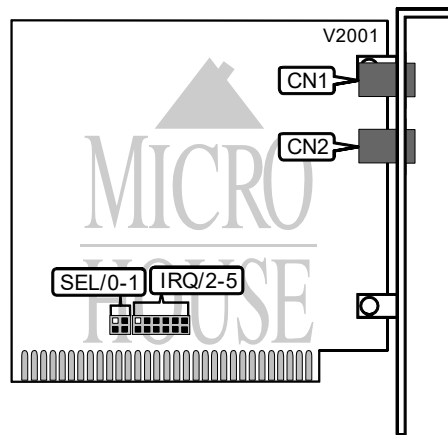

CONNECTIONS			
Function	Label	Function	Label
Line out/in - Unidentified	CN1	Line in/out - Unidentified	CN2

SERIAL PORT ADDRESS		
Setting	SEL/0	SEL/1
COM1 (3F8h)	Open	Open
i COM2 (2F8h)	Closed	Open
COM3 (3E8h)	Open	Closed
COM4 (2E8h)	Closed	Closed

INTERRUPT				
Setting	IRQ/2	IRQ/3	IRQ/4	IRQ/5
2	Closed	Open	Open	Open
i 3	Open	Closed	Open	Open
4	Open	Open	Closed	Open
5	Open	Open	Open	Closed

MISCELLANEOUS TECHNICAL NOTE
Note: This modem sends Faxes at 9600bps and receives at 4800pbs

Proprietary AT Command Set

See document V1998 for a full command summary.