


INTEL CORPORATION ABOVE BOARD/PC

Card Type	Memory card
Chip Set	Unidentified
Maximum Onboard Memory	2MB RAM (Type unidentified)
I/O Options	None
Data Bus	8-bit ISA
Floppy drives supported	None

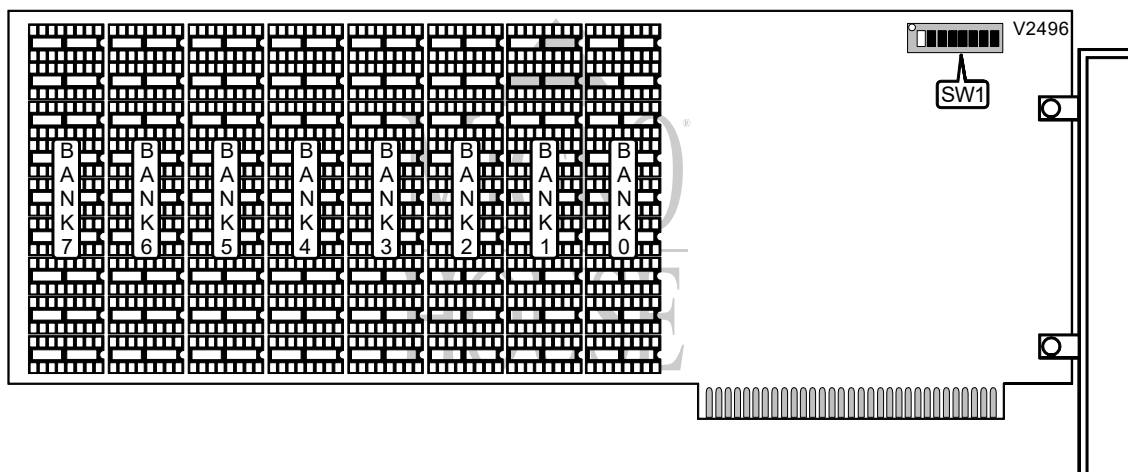

USER CONFIGURABLE SETTINGS			
Function		Label	Position
i Chip type selected at 256KB		SW 1/1	On
Chip type selected at 64KB		SW 1/1	Off

SYSTEM MEMORY CONFIGURATION				
Size	SW 1/2		SW 1/3	
256KB	Off		On	
320KB	Off		On	
384KB	Off		Off	
448KB	Off		Off	
512KB	On		On	
576KB	On		On	
640KB	On		Off	

RAM CONFIGURATION (64KB CHIPS)				
Size	Bank 0	Bank 1	Bank 2	Bank 3
64KB	(9) 64K x 1	NONE	NONE	NONE
128KB	(9) 64K x 1	(9) 64K x 1	NONE	NONE
192KB	(9) 64K x 1	(9) 64K x 1	(9) 64K x 1	NONE
256KB	(9) 64K x 1	(9) 64K x 1	(9) 64K x 1	(9) 64K x 1
320KB	(9) 64K x 1	(9) 64K x 1	(9) 64K x 1	(9) 64K x 1
384KB	(9) 64K x 1	(9) 64K x 1	(9) 64K x 1	(9) 64K x 1
448KB	(9) 64K x 1	(9) 64K x 1	(9) 64K x 1	(9) 64K x 1
512KB	(9) 64K x 1	(9) 64K x 1	(9) 64K x 1	(9) 64K x 1

Continued on next page. . .

INTEL CORPORATION

ABOVE BOARD/PC

. . . continued from previous page

RAM CONFIGURATION (64KB CHIPS CON'T)				
Size	Bank 4	Bank 5	Bank 6	Bank 7
64KB	NONE	NONE	NONE	NONE
128KB	NONE	NONE	NONE	NONE
192KB	NONE	NONE	NONE	NONE
256KB	NONE	NONE	NONE	NONE
320KB	(9) 64K x 1	NONE	NONE	NONE
384KB	(9) 64K x 1	(9) 64K x 1	NONE	NONE
448KB	(9) 64K x 1	(9) 64K x 1	(9) 64K x 1	NONE
512KB	(9) 64K x 1	(9) 64K x 1	(9) 64K x 1	(9) 64K x 1

RAM CONFIGURATION (256KB CHIPS)				
Size	Bank 0	Bank 1	Bank 2	Bank 3
256KB	NONE	NONE	NONE	NONE
512KB	(9) 256K X 1	NONE	NONE	NONE
768KB	(9) 256K X 1	(9) 256K X 1	NONE	NONE
1024KB	(9) 256K X 1	(9) 256K X 1	(9) 256K X 1	NONE
1280KB	(9) 256K X 1	(9) 256K X 1	(9) 256K X 1	(9) 256K X 1
1536KB	(9) 256K X 1	(9) 256K X 1	(9) 256K X 1	(9) 256K X 1
1792KB	(9) 256K X 1	(9) 256K X 1	(9) 256K X 1	(9) 256K X 1
2048KB	(9) 256K X 1	(9) 256K X 1	(9) 256K X 1	(9) 256K X 1

RAM CONFIGURATION (256KB CHIPS CON'T)				
Size	Bank 4	Bank 5	Bank 6	Bank 7
256KB	NONE	NONE	NONE	(9) 256K X 1
512KB	NONE	NONE	NONE	(9) 256K X 1
768KB	NONE	NONE	NONE	(9) 256K X 1
1024KB	NONE	NONE	NONE	(9) 256K X 1
1280KB	NONE	NONE	NONE	(9) 256K X 1
1536KB	(9) 256K X 1	NONE	NONE	(9) 256K X 1
1792KB	(9) 256K X 1	(9) 256K X 1	NONE	(9) 256K X 1
2048KB	(9) 256K X 1	(9) 256K X 1	(9) 256K X 1	(9) 256K X 1

Continued on next page. . .

INTEL CORPORATION ABOVE BOARD/PC

. . . continued from previous page

BASE I/O ADDRESS SELECTION				
Setting	SW1/5	SW1/6	SW1/7	SW1/8
208h & 209h	On	On	On	On
218h & 219h	On	On	On	Off
258h & 259h	On	Off	On	Off
268h & 269h	On	Off	Off	On
2A8h & 2A9h	Off	On	Off	On
2B8h & 2B9h	Off	On	Off	Off
2E8h & 2E9h	Off	Off	Off	On