


SEAGATE TECHNOLOGY, INC.
ST01-A, ST01-B, ST01-E50

Q3/92

Data bus: 8-bit, ISA
Size: Half-length, full-height card
Hard drives supported: Up to seven SCSI devices
Floppy drives supported: None

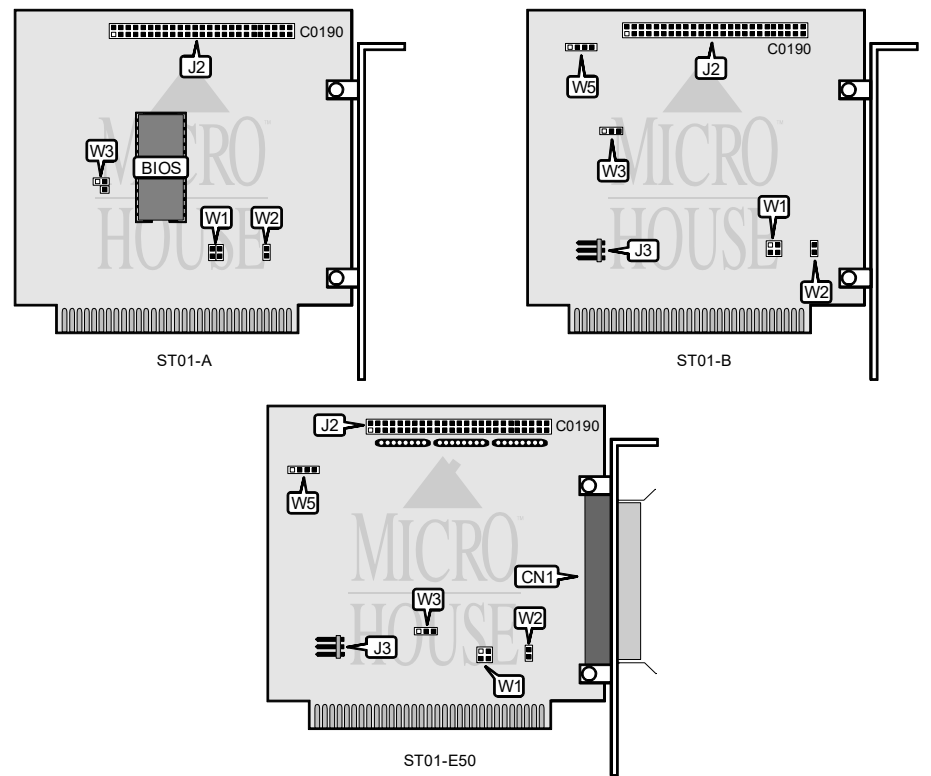

CONNECTIONS	
Function	Location
50-pin SCSI connector-external (ST01-E50 only)	CN1
50-pin SCSI connector-internal	J2
5-pin connector-DC power	J3
4-pin connector-drive active LED	J5

SEAGATE TECHNOLOGY, INC.

ST01-A, ST01-B, ST01-E50

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Location	Setting
í Zero wait state disabled	W2	open
Zero wait state enabled	W2	closed
í Hard Drive Interrupt is IRQ5	W3	pins 2 & 3 closed
Hard Drive Interrupt is IRQ3	W3	pins 1 & 2 closed
Interrupts disabled	W3	open

8K BIOS ADDRESS		
Address	W1 pins 1 & 2	W1 pins 3 & 4
í CA000h	open	open
C8000h	closed	open
CE000h	open	closed
DE000h	closed	closed

16K BIOS ADDRESS		
Address	W1 pins 1 & 2	W1 pins 3 & 4
í C800h	open	open
Not valid	closed	open
CC00h	open	closed
DC00h	closed	closed