


TRANTOR SYSTEMS, LTD.

T130

Q4/93

Data bus: 8-bit, ISA
Size: Half-length, full-height card
Hard drive supported: Up to seven SCSI devices
Floppy drives supported: None

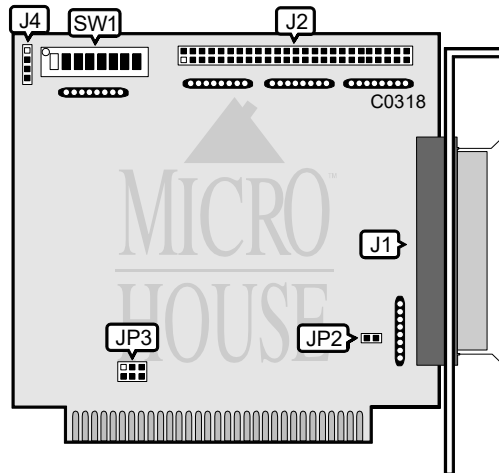

CONNECTIONS	
Function	Location
DB25 SCSI connector - external	J1
50-pin SCSI connector - internal	J2
4-pin connector - Drive Activity LED	J4

I/O PORT ADDRESS		
Address	SW1/switch 1	SW1/switch 2
350h	off	off
340h	off	on
250h	on	off
240h	on	on

Continued on next page . . .

TRANTOR SYSTEMS, LTD. T130

... continued from previous page

BIOS ADDRESS - SW1			
Address	SW1/switch 3	SW1/switch 4	SW1/switch 5
Disabled	off	off	off
CA00h	off	off	on
CE00h	off	on	off
DA00h	off	on	on
DE00h	on	off	off
Reserved	on	off	on
Reserved	on	on	off
Reserved	on	on	on

INTERRUPT REQUEST			
IRQ	JP3/jumper 1	JP3/jumper 2	JP3/jumper 3
Disabled	open	open	open
IRQ3	closed	open	open
IRQ5	open	closed	open
IRQ7	open	open	closed

USER CONFIGURABLE SETTINGS		
Function	Location	Setting
BIOS enabled	SW1/switch 6	off
BIOS disabled	SW1/switch 6	on
Factory configured - do not alter	SW1/switch 7	off
Factory configured - do not alter	SW1/switch 8	off
Zero Wait State disabled	JP2	open
Zero Wait State enabled	JP2	closed