


UNIDENTIFIED EX-5105(A4 MINI)

Data Bus: 16-bit ISA
Size: Half-length, half-height card
Hard drives supported: IDE (AT) drives (2)
Floppy drives supported: Two 360KB, 720KB, 1.2MB, or 1.44MB drives

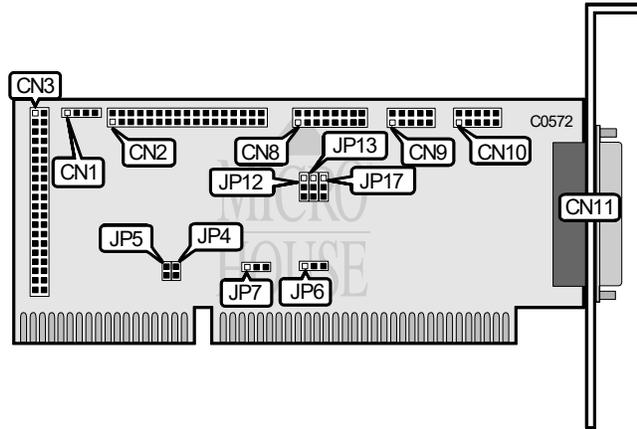

CONNECTIONS	
Function	Location
4-pin connector-drive active LED	CN1
34-pin data cable connector-floppy drive	CN2
40-pin IDE (AT) interface connector internal	CN3
16-pin game port	CN8
10-pin connector-serial port 1	CN9
10-pin connector-serial port 2	CN10
25-pin connector-parallel port	CN11

HARD DISK CONFIGURATION		
Function	JP4	JP5
Hard drive enabled	Closed	Closed
Hard drive disabled	Open	Open

SERIAL PORT CONFIGURATION			
Port 1	Port 2	JP6	JP7
COM1	COM2	Pins 1 & 2 closed	Pins 1 & 2 closed
COM1	COM4	Pins 1 & 2 closed	Pins 2 & 3 closed
COM3	COM4	Pins 2 & 3 closed	Pins 1 & 2 closed
COM2	COM3	Pins 2 & 3 closed	Pins 2 & 3 closed

Continued on next page. . .

UNIDENTIFIED
EX-5105(A4 MINI)

...continued from previous page

PRINTER PORT CONFIGURATION		
Function	JP12	JP13
LPT2	Pins 1 & 2 closed	Pins 1 & 2 closed
LPT1	Pins 1 & 2 closed	Pins 2 & 3 closed
LPT3	Pins 2 & 3 closed	Pins 1 & 2 closed
Disabled	Pins 2 & 3 closed	Pins 2 & 3 closed

USER CONFIGURABLE SETTINGS		
Function	Location	Setting
í Floppy drive enabled	JP17	Pins 1 & 2 closed
Floppy drive disabled	JP17	Pins 2 & 3 closed