Q3/95


TEKRAM TECHNOLOGY COMPANY, LTD. DC - 380

Data bus: 32-bit VL-Bus

Size: Three/quarter-length, full-height card Up to seven SCSI drives

Hard drive supported:

Floppy drives supported: Two 360KB, 720KB, 1.2MB, or 1.44MB drives

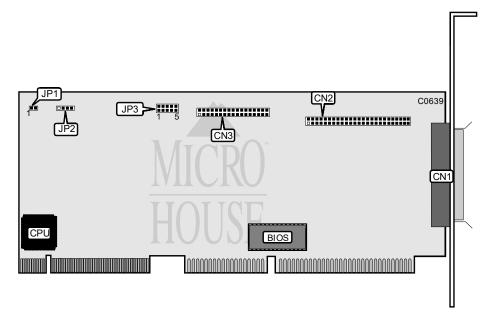

CONNECTIONS				
Function	Location			
50-pin SCSI connector - external	CN1			
50-pin SCSI connector - internal	CN2			
34-pin cable connector - floppy drive	CN3			
2-pin connector - drive active LED	JP1			
4-pin connector - speaker	JP2			

USER CONFIGURABLE SETTINGS			
Function	Location	Setting	
í Floppy drive enabled	JP3/jumper 1	closed	
Floppy drive disabled	JP3/jumper 1	open	
í Factory configured - do not alter	JP3/jumper 5	open	

Continued on next page. . .

TEKRAM TECHNOLOGY COMPANY, LTD. DC - 380

. . .continued from previous page

BASE I/O ADDRESS				
Address	JP3/jumper 2	JP3/jumper 3	JP3/jumper 4	
í 330h	closed	closed	closed	
130h	open	open	closed	
134h	open	open	open	
230h	open	closed	closed	
234h	open	closed	open	
334h	closed	open	closed	