


80 DATA SUPER FDC CARD

Card Type	Floppy drive controller
Hard Drives supported	None
Floppy drives supported	Four 360KB, 720KB, 1.2MB, or 1.44MB drives
Data Bus	8-bit ISA
Card Size	Half-length, full-height card

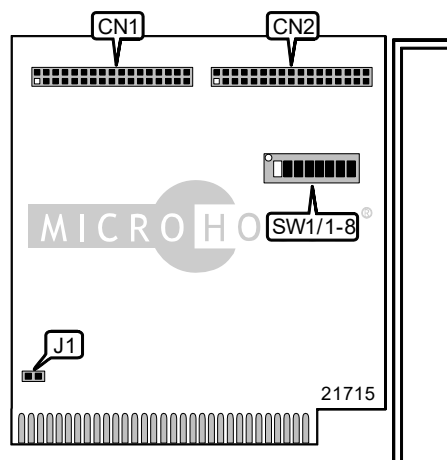

CONNECTIONS			
Function	Location	Function	Location
34-pin cable connector - floppy drive	CN1	34-pin cable connector - floppy drive	CN2

USER CONFIGURABLE SETTINGS			
Function	Label	Position	
Primary address select	J1	Closed	
Secondary address select	J1	Open	

DRIVE A DRIVE TYPE SELECTION			
Type	SW1/1	SW1/2	
360K	On	On	
720K	On	Off	
1.2M	Off	On	
1.44M	Off	Off	

DRIVE B DRIVE TYPE SELECTION			
Type	SW1/3	SW1/4	
360K	On	On	
720K	On	Off	
1.2M	Off	On	
1.44M	Off	Off	

DRIVE C DRIVE TYPE SELECTION			
Type	SW1/5	SW1/6	
360K	On	On	
720K	On	Off	
1.2M	Off	On	
1.44M	Off	Off	

Continued on next page . . .

MANUFACTURER MODEL

. . . continued from previous page

DRIVE D DRIVE TYPE SELECTION		
Type	SW1/7	SW1/8
360K	On	On
720K	On	Off
1.2M	Off	On
1.44M	Off	Off