


OLIVETTI

G0579 (EFP-2)

Card Type	Hard drive controller card
Maximum Onboard Memory	Unidentified
Hard Drives supported	Up to 15 SCSI devices
Floppy drives supported	None
Data Bus	32-bit EISA
Card Size	Full-length, full-height card

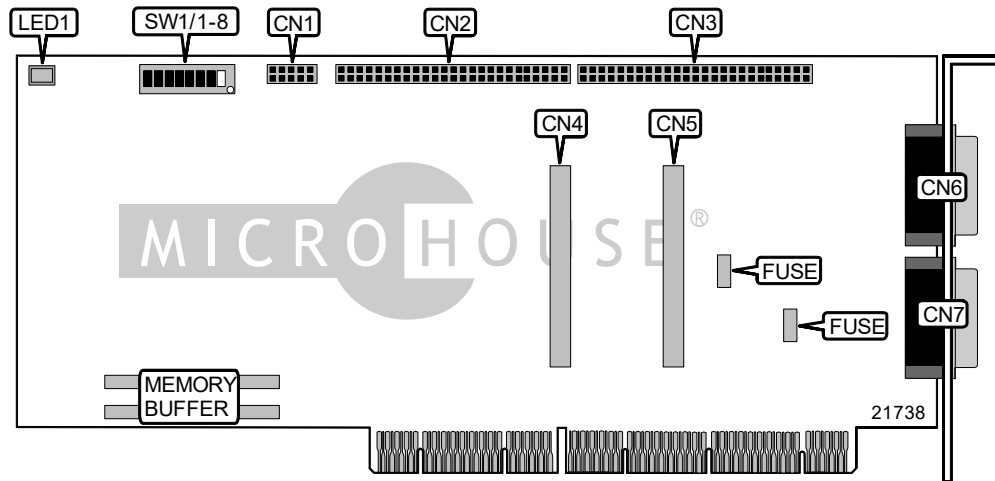

CONNECTIONS			
Function	Location	Function	Location
Serial port - internal	CN1	Piggy back board connector	CN5
50-pin SCSI connector channel 2 - internal	CN2	50-pin SCSI connector channel 2 - external	CN6
50-pin SCSI connector channel 1 - internal	CN3	50-pin SCSI connector channel 1 - external	CN7
Piggy back board connector	CN4		

USER CONFIGURABLE SETTINGS		
Function	Label	Position
Diagnostic mode enabled	SW1/8	On
Diagnostic mode disabled	SW1/8	Off

SCSI CHANNEL 1 HOST SELECTION		
Setting	SW1/1	SW1/8
ID7 (mono host)	On	Off
ID6 (dual host)	Off	Off

SCSI CHANNEL 2 HOST SELECTION		
Setting	SW1/2	SW1/8
ID7 (mono host)	On	Off
ID6 (dual host)	Off	Off

Continued on next page . . .

OLIVETTI

G0579 (EFP-2)

. . . continued from previous page

SCSI CHANNEL 1 MIRRORING SELECTION				
Mirroring	SW1/3	SW1/4	SW1/5	SW1/8
0 pairs	On	Off	Off	Off
1 pair	On	On	Off	Off
2 pairs	On	Off	On	Off
3 pairs	On	On	On	Off

SCSI CHANNEL 2 MIRRORING SELECTION				
Mirroring	SW1/3	SW1/6	SW1/7	SW1/8
0 pairs	On	Off	Off	Off
1 pair	On	On	Off	Off
2 pairs	On	Off	On	Off
3 pairs	On	On	On	Off

DUAL MIRRORING SELECTION						
Mirroring	SW1/3	SW1/4	SW1/5	SW1/6	SW1/7	SW1/8
1 pairs	Off	On	Off	Off	Off	Off
2 pairs	Off	Off	On	Off	Off	Off
3 pairs	Off	On	On	Off	Off	Off
4 pairs	Off	Off	Off	On	Off	Off
5 pairs	Off	On	Off	On	Off	Off
6 pairs	Off	Off	On	On	Off	Off

MISCELLANEOUS TECHNICAL NOTES	
Adapter is supported only in ESC-1 and ESC-2 compatibility modes.	
Adapter is a RAID controller and supports only hard drives.	