


IBM CORPORATION
TOKEN-RING PC ADAPTER

NIC Type	Token-Ring
Transfer Rate	4Mbps
Data Bus	8-bit ISA
Topology	Ring
Wiring Type	Shielded twisted pair
Boot ROM	Available

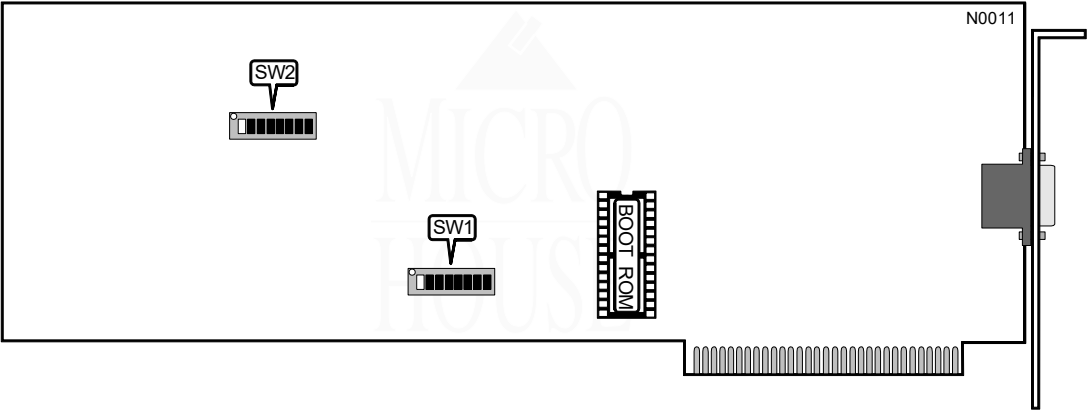

BOOT ROM ADDRESS SELECTION						
Address	SW1/1	SW1/2	SW1/3	SW1/4	SW1/5	SW1/6
CC00h	Off	On	On	Off	Off	On
A000h	On	Off	On	On	On	On
A400h	On	Off	On	On	Off	On
A800h	On	Off	On	Off	On	On
AC00h	On	Off	On	Off	Off	On
B000h	On	Off	Off	On	On	On
B400h	On	Off	Off	On	Off	On
B800h	On	Off	Off	Off	On	On
BC00h	On	Off	Off	Off	Off	On
C000h	Off	On	On	On	On	On
C400h	Off	On	On	On	Off	On
C800h	Off	On	On	Off	On	On
CE00h	Off	On	On	Off	Off	Off
D000h	Off	On	Off	On	On	On
D200h	Off	On	Off	On	On	Off
D400h	Off	On	Off	On	Off	On
D800h	Off	On	Off	Off	On	On
DC00h	Off	On	Off	Off	Off	On
E000h	Off	Off	On	On	On	On
E400h	Off	Off	On	On	Off	On
E800h	Off	Off	On	Off	On	On
EC00h	Off	Off	On	Off	Off	On
F000h	Off	Off	Off	On	On	On

Continued on next page

**IBM CORPORATION
TOKEN-RING PC ADAPTER**

... continued from previous page

INTERRUPT REQUEST SELECTION		
IRQ	SW1/7	SW1/8
2	On	On
3	On	Off
7	Off	Off

I/O BASE ADDRESS SELECTION	
I/O Address	SW2/1 - 8
iA20h	Off
A24H	On

MISCELLANEOUS TECHNICAL NOTES
The boot ROM can only be used if the workstation operates at 6MHz or less, uses 1 wait state on the bus, and does not contain a hard disk.