


Chapter 5: Jumper Settings
COGENT DATA TECHNOLOGIES, INC.
EMASTER+ EM110 TX ISA COMBO

NIC Type	Ethernet
Transfer Rate	10/100Mbps
Data Bus	16-bit ISA
Topology	Linear Bus/Star
Wiring Type	Shielded twisted pair
	Unshielded twisted pair
	RG58A/U 50ohm coaxial
Boot ROM	Available

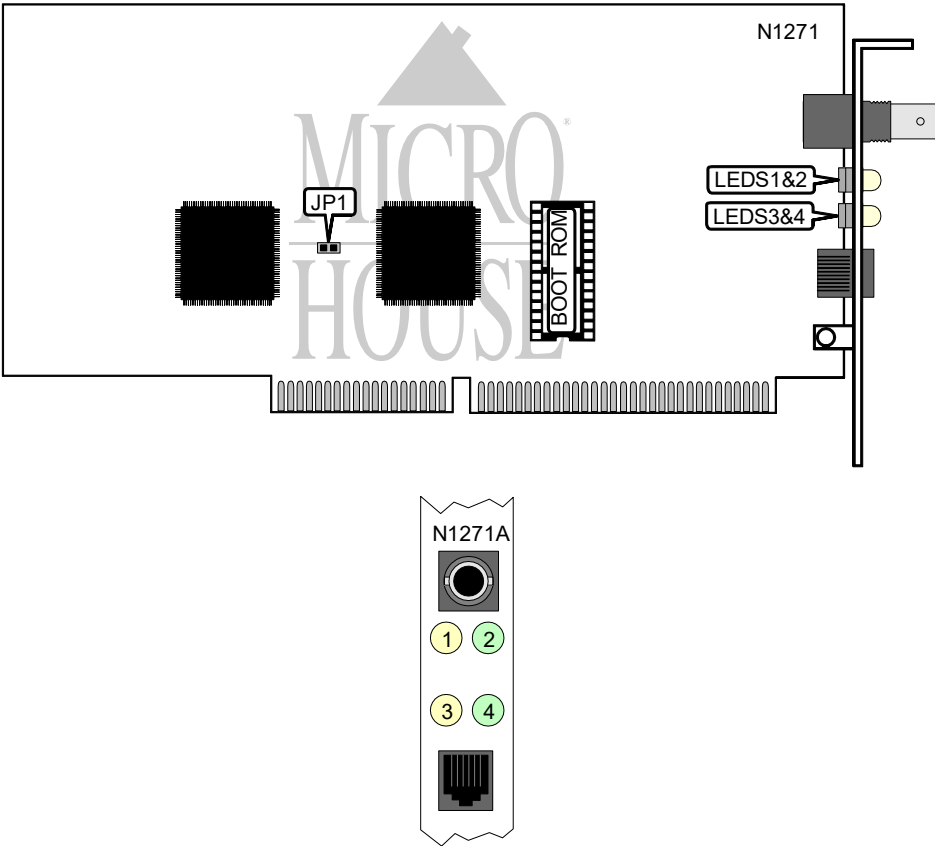

PLUG AND PLAY SELECTION	
Setting	JP1
Enabled	Open
Disabled	Closed

Continued next page...

THE NETWORK INTERFACE CARD TECHNICAL GUIDE
COGENT DATA TECHNOLOGIES, INC.
EMASTER+ EM110 TX ISA COMBO

... continued from previous page.

DIAGNOSTIC LED(S)			
LED	Color	Status	Condition
LED1	Yellow	On	Network activity is detected at 10Mbps
LED1	Yellow	Off	Network activity is not detected at 10Mbps
LED2	Green	On	10Base-T network connection is good at 10Mbps
LED2	Green	Off	10Base-T network connection is broken at 10Mbps
LED3	Yellow	On	Network activity is detected at 100Mbps
LED3	Yellow	Off	Network activity is not detected at 100Mbps
LED4	Green	On	10Base-T network connection is good at 100Mbps
LED4	Green	Off	10Base-T network connection is broken at 100Mbps