


**Chapter 5: Jumper Settings**  
**STANDARD MICROSYSTEMS CORPORATION**  
**ETHERPOWER SMC8432BT**

<b>NIC Type</b>	Ethernet
<b>Transfer Rate</b>	10Mbps
<b>Data Bus</b>	32-bit PCI
<b>Topology</b>	Linear Bus/Star
<b>Wiring Type</b>	Unshielded twisted pair
	RG-58A/U 50ohm coaxial
<b>Boot ROM</b>	Available

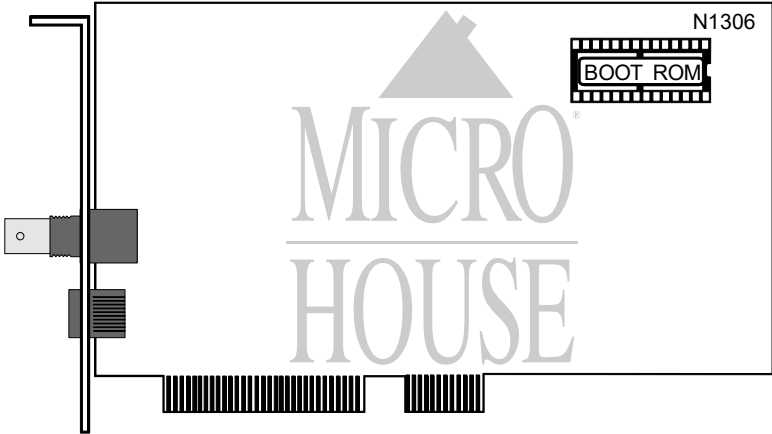

DIAGNOSTIC LED(S)			
LED	Color	Status	Condition
LED1	Green	On	10Base-T network connection is good
LED1	Green	Off	10Base-T network connection is broken
LED2	Amber	Blinking	Data is being transmitted/received
LED2	Amber	Off	Data is not being transmitted/received
Note: LED1 and LED2 are integrated within the RJ-45 connector.			