


EDIMAX COMPUTER COMPANY

EN5100 PCI BUS ETHERNET ADAPTER

Card Type	Network Interface Card
NIC Type	Ethernet
Maximum Onboard Memory	Unidentified
Boot ROM	Unidentified
Network Transfer Rate	10Mbps
Topology	Linear Bus, Star
Wiring Type	Unshielded twisted pair
	AUI transceiver via DB-15 port
	RG-58A/U 50ohm coaxial
Data Bus	32-bit PCI

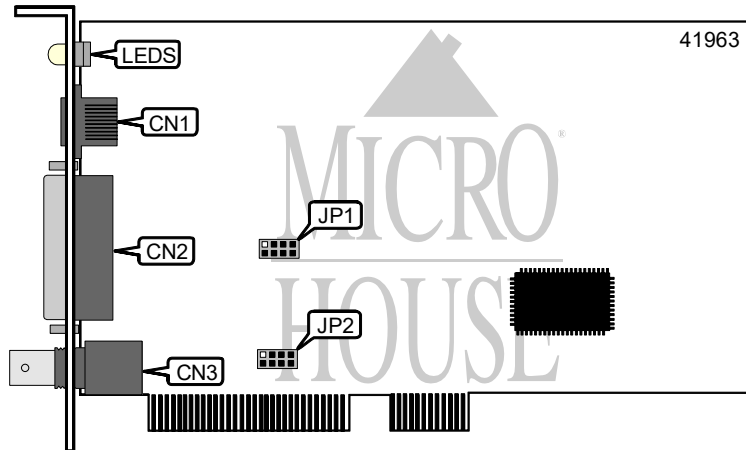

CONNECTIONS			
Function	Label	Function	Label
UTP connector	CN1	RG-58A/U connector	CN3
AUI connector	CN2		

USER CONFIGURABLE SETTINGS				
Setting	JP1/1	JP1/2	JP1/3	JP1/4
iAUI connector enabled	Closed	Open	Open	Open
BNC connector enabled	Open	Open	Open	Closed

Note: Jumper settings not required when using RJ-45 connector

PCI INTERRUPT SELECTION				
Setting	JP2/1	JP2/2	JP2/3	JP2/4
iINTA	Closed	Open	Open	Open
INTB	Open	Closed	Open	Open
INTC	Open	Open	Closed	Open
INTD	Open	Open	Open	Closed

DIAGNOSTIC LED(S)
Note: Function of LEDs is unidentified.