


CABLETRON SYSTEMS, INC.

F3019, F3059

| | |
|------------------------|------------------------------------|
| Card Type | Network Interface Card |
| NIC Type | FDDI |
| Maximum Onboard Memory | Unidentified |
| Boot ROM | Unidentified |
| Network Transfer Rate | 100Mbps |
| Topology | Star |
| Wiring Type | Unshielded twisted pair |
| | Shielded twisted pair (F3059 only) |
| Data Bus | MCA |

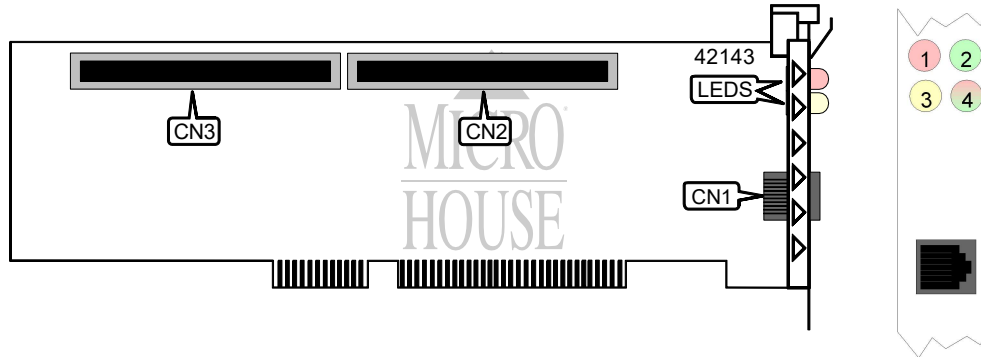

| CONNECTIONS | | | |
|--------------------------------|-------|--------------------------------|-------|
| Function | Label | Function | Label |
| UTP via RJ-45 connector | CN1 | Daughter board cable connector | CN3 |
| Daughter board cable connector | CN2 | | |

| DIAGNOSTIC LED(S) | | | |
|-------------------|-----------|----------|---------------------------------------|
| LED | Color | Status | Condition |
| LED1 | Red | Blinking | Processor is functioning normally |
| LED1 | Red | Off | Processor is not functioning normally |
| LED2 | Green | On | Data is being transmitted |
| LED2 | Green | Off | Data is not being transmitted |
| LED3 | Yellow | On | Data is being received |
| LED3 | Yellow | Off | Data is not being received |
| LED4 | Red | On | Network connection is broken |
| LED4 | Green | On | Network connection is good |
| LED4 | Red/Green | Off | Collision detected on network |