


INTEL CORPORATION

ETHERNETEXPRES PRO/100+ DUAL PORT SERVER ADAPTER (PILA8472)

Card Type	Network Interface Card
NIC Type	Ethernet
Maximum Onboard Memory	6KB cache per port
Boot ROM	Not available
Network Transfer Rate	100Mbps/10Mbps
Topology	Star
Wiring Type	Unshielded twisted pair
Data Bus	32-bit PCI

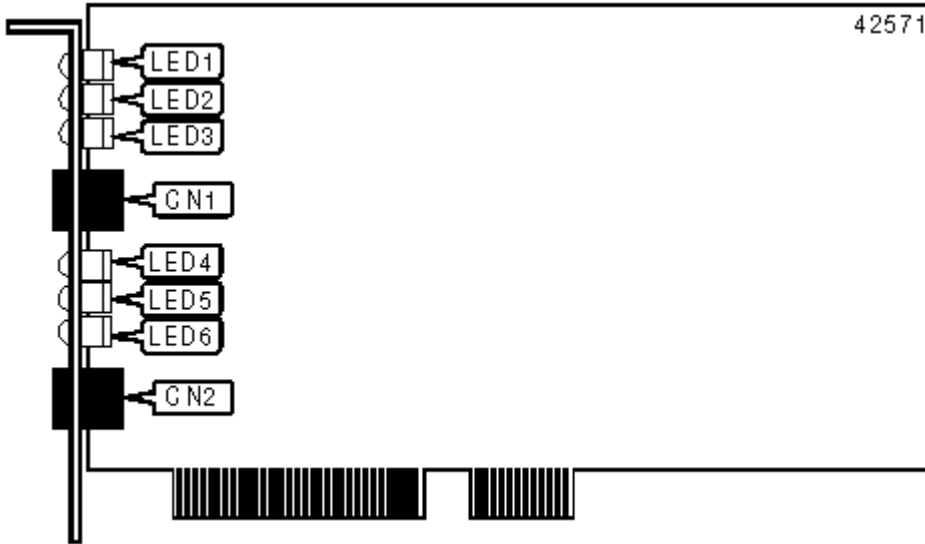

CONNECTIONS

Function	Label	Function	Label
Port 1 via RJ-45 UTP connector	CN1	Port 2 via RJ-45 UTP connector	CN2

DIAGNOSTIC LED(S)

LED	Color	Status	Condition
LED1	Unidentified	On	Port 1 network connection is good
LED1	Unidentified	Off	Port 1 network connection is not good
LED2	Unidentified	Blinking	Data is being received on port 1
LED2	Unidentified	Off	Data is not being received on port 1
LED3	Unidentified	On	Port 1 is operating at 100 Mbps
LED3	Unidentified	Off	Port 1 is operating at 10 Mbps
LED4	Unidentified	On	Port 2 network connection is good
LED4	Unidentified	Off	Port 2 network connection is not good

LED5	Unidentified	Blinking	Data is being received on port 2
LED5	Unidentified	Off	Data is not being received on port 2
LED6	Unidentified	On	Port 2 is operating at 100 Mbps
LED6	Unidentified	Off	Port 2 is operating at 10 Mbps