
WESTERN DIGITAL CORPORATION PARADISE ACCELERATOR

CategoryVideoVideo Types SupportedXVGAVideo ProcessorWD90C31Highest Resolution1280 X 1024

Supported

Data Bus Type 16-bit ISA Memory Type DRAM Maximum Onboard Memory 1024KB

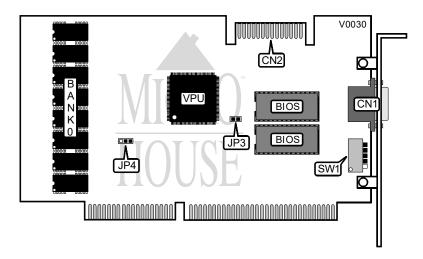

CONNECTIONS			
Purpos :	Location	Purpos :	Location
15-pin analog video port	CN1	Feature connector	CN2

ZERO WAIT STATE SELECTION		
Setting	JP3	
íEnabled	Closed	
Disabled	Open	

ADDRESS LATCH CONFIGURATION		
Setting	JP4	
íAddress latch line tied to VCC enabled	Pins 1 & 2 closed	
Address latch line to bus enabled	Pins 2 & 3 closed	

Continued on next page . . .

WESTERN DIGITAL CORPORATION PARADISE ACCELERATOR

. . . continued from previous page

8	800 X 600 REFRESH RATE SELECTION			
Rate	SW1/ ⁻	SW1/2		
56.5Hz	Off	Off		
72.1Hz	On	Off		
60.5Hz	Off	On		
56.5Hz	On	On		

1024 X 768 REFRESH RATE CONFIGURATION				
ate	N ode	S V1/1	S V1/2	
86.7Hz	Interlaced	Off	Off	
70.2Hz	Non-Interlaced	On	Off	
60.2Hz	Non-Interlaced	Off	On	
72.3HZ	Non-Interlaced	On	On	

FONT SELECTION		
Setting SW1/5		
í Standard fonts	Off	
TUV fonts	On	
Note: TUV is the German standard for character spacing, and may not be compatible with some DOS		

applications.