


EVEREX SYSTEMS, INC. EVERGRAPHICS PLUS EV-231A

Category	Video
Video Types Supported	Monochrome
Video Processor	6845
Highest Resolution Supported	720 x 348
Data Bus Type	8-bit ISA
Memory Type	DRAM
Maximum Onboard Memory	64KB (Exact location of memory is unidentified)

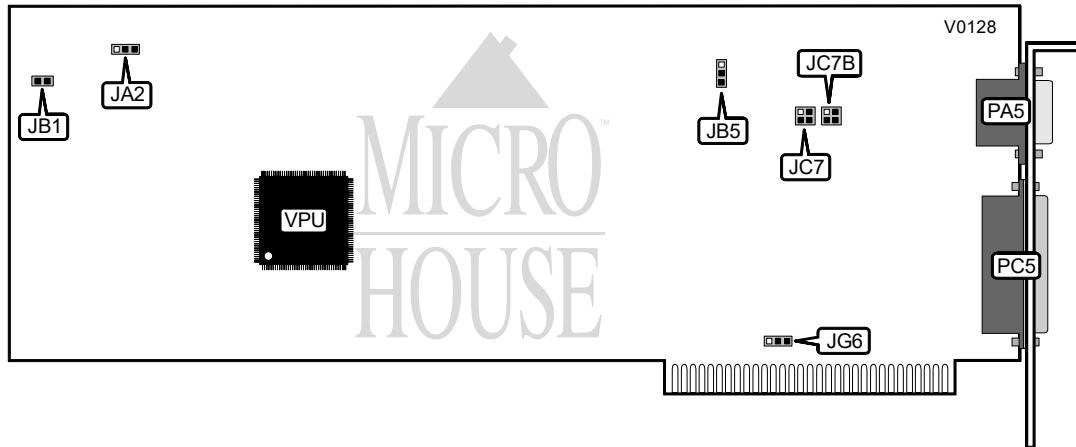

CONNECTIONS			
Purpose	Location	Purpose	Location
Monochrome video port	PA5	Parallel port	PC5

COLUMN (132) DISPLAY CONFIGURATION	
Setting	JA2
Enabled	Pins 1 & 2 closed
Disabled	Pins 2 & 3 closed

PARALLEL PORT INTERRUPT SELECTION	
IRQ	JG6
7	Pins 2 & 3 closed
5	Pins 1 & 2 closed

Continued on next page . . .

EVEREX SYSTEMS, INC.
EVERGRAPHICS PLUS EV-231A

... continued from previous page

PARALLEL PORT CONFIGURATION		
LP1	Address	JC7
1	3BCh - 3BEh	Pins 1 & 2 closed
2	378h - 37Fh	Pins 3 & 4 closed
3	278h - 27Fh	Pins 1 & 2, 3 & 4 closed
Disabled	N/A	Open

FACTORY CONFIGURED - DO NOT ALTER	
Jumper	Position
JB1	Closed
JB5	Open
JC7B	Open