


KOUWELL ELECTRONIC CORPORATION

KM-516

Card Type Multi I/O card
Chipset/Controller National Semiconductor
I/O Options Floppy drive interface, game port, parallel port, serial ports (2)
Maximum DRAM N/A

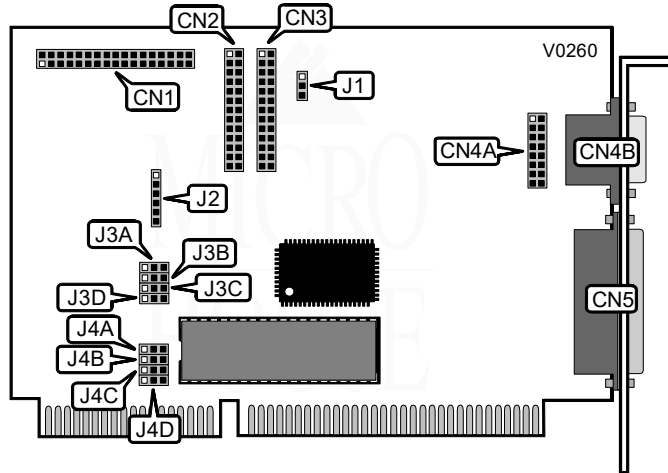

CONNECTIONS			
Purpose	Location	Purpose	Location
Floppy Drive Interface	CN1	Game port 16-pin header	CN4A
Serial port 1	CN2	Game port DB-15	CN4B
Serial port 2	CN3	Parallel port	CN5

SERIAL PORT CONFIGURATION					
Port 1 (CN2)	Port 2 (CN3)	J3A	J3B	J3C	J3D
COM1	COM2	Open	Open	Pins 1 & 2	Pins 2 & 3
COM1	Disabled	Open	Open	Open	Pins 2 & 3
Disabled	COM2	Open	Open	Pins 1 & 2	Open
COM3	COM4	Pins 1 & 2	Pins 2 & 3	Open	Open
COM3	Disabled	Open	Pins 2 & 3	Open	Open
Disabled	COM4	Pins 1 & 2	Open	Open	Open

Note: Pins designated should be in the closed position.

Continued on next page . . .

KOUWELL ELECTRONIC CORPORATION
 KM-516

... continued from previous page

SERIAL PORT INTERRUPT SELECTION					
Port 1 (CN2)	Port 2 (CN3)	J4A	J4B	J4C	J4D
í IRQ4	í IRQ3	Open	Pins 1 & 2	Pins 2 & 3	Open
IRQ4	Disabled	Open	Open	Pins 2 & 3	Open
Disabled	IRQ3	Open	Pins 1 & 2	Open	Open
IRQ5	IRQ2	Pins 1 & 2	Open	Open	Pins 2 & 3
IRQ5	Disabled	Open	Open	Open	Pins 2 & 3
Disabled	IRQ2	Pins 1 & 2	Open	Open	Open

Note: Pins designated should be in the closed position.

PARALLEL PORT CONFIGURATION			
LPT	Mode	J1	J2
í 1	í Unidirectional	Pins 1 & 2 closed	Pins 4 & 5 closed
2	Bidirectional	Pins 2 & 3 closed	Pins 5 & 6 closed