
## UNIDENTIFIED GP4000

r

Category Video Types Supported Video Processor Video XVGA **Highest Resolution** Supported Data Bus Type Memory Type Maximum Onboard Memory 2048KB

Tseng Labs 1024 x 768 VESA local bus DRAM

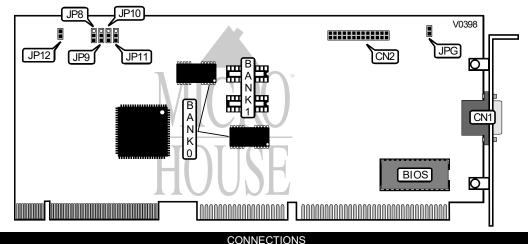

CONNECTIONS					
Purpos 🔅	Location	Purpos 🕴	Location		
15 pin analog video port	CN1	Green feature connector	JPG		
VESA Feature connector	CN2				

	WAIT STATE SELECT	
Wait Sate	JP8	JP9
í 2	Pins 2 & 3 closed	Pins 1 & 2 closed
1	Pins 2 & 3 closed	Pins 2 & 3 closed
3	Pins 1 & 2 closed	Pins 2 & 3 closed
4	Pins 1 & 2 closed	Pins 1 & 2 closed

DRAM CONFIGURATION				
Size	JP10	JP11	3ANK 0	BANK 1
1MB	Pins 2 & 3 closed	Pins 1 & 2 closed	(2) 512K x 8	NONE
2MB	Pins 2 & 3 closed	Pins 2 & 3 closed	(2) 512K x 8	(2) 512K x 8

BCM BOARD CONFIGURATION				
Туре	JP12			
BCM	Closed			
Non-BCM	Open			
Note: The BCM setting is for mainboards that have the "Green PC" feature.				