


DIAMOND MULTIMEDIA SYSTEMS, INC.  
SPEEDSTAR 64 ISA

**Category** Video  
**Video Types Supported** XVGA  
**Video Processor** Unidentified  
**Highest Resolution Supported** 1280 x 1024  
**Data Bus Type** 16-bit ISA  
**Memory Type** DRAM  
**Maximum Onboard Memory** 2MB

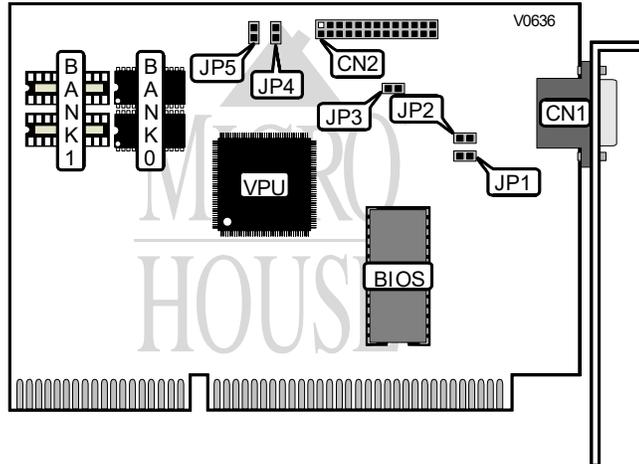

CONNECTIONS			
Purpose	Location	Purpose	Location
15-pin analog video connector	CN1	VGA feature connector	CN2

ZERO WAIT STATE SELECT	
Setting	JP1
10 wait state enabled	Closed
0 wait state disabled	Open

INTERRUPT SELECT	
IRQ2	JP2
1 Enabled	Closed
0 Disabled	Open

DRAM CONFIGURATION		
Size	Bank 1	Bank 2
1MB	(2) 512K x 9	NONE
2MB	(2) 512K x 9	(2) 512K x 9

Continued on next page...

DIAMOND MULTIMEDIA SYSTEMS, INC.  
SPEEDSTAR 64 ISA

...continued from previous page

FACTORY SELECT	
Jumper	Setting
JP3	N/A
JP4	N/A
JP5	N/A

Note: JP3 & JP4 & JP5 are used for factory testing, do not alter.