


AST RESEARCH, INC.
C-6 DASH (230400-003)

Category	Video
Video Types Supported	XVGA
Video Processor	Unidentified
Highest Resolution Supported	1024 x 768
Data Bus Type	16-bit ISA
Memory Type	Unidentified
Maximum Onboard Memory	Unidentified

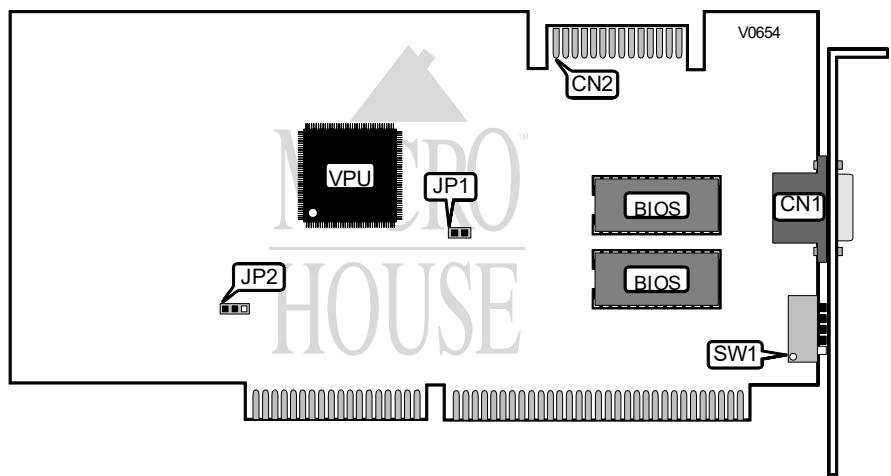

CONNECTIONS			
Purpose	Location	Purpose	Location
15-pin analog video port	CN1	VGA feature connector	CN2

800 X 600 MODE SETTINGS		
Monitor Timing	SW 1	SW 2
Vertical 56Hz NL, Horizontal 35.12	Off	Off
Vertical 72Hz NL, Horizontal 37.83	On	Off
Vertical 60Hz NL, Horizontal 47.67	Off	On
Vertical 56Hz NL, Horizontal 35.12	On	On

1024 x 768 MODE SETTINGS		
Monitor Timing	SW 3	SW 4
Vertical 87Hz Interlaced, Horizontal 35.60	Off	Off
Vertical 70Hz NL, Horizontal 56.56	On	Off
Vertical 60Hz NL, Horizontal 48.37	Off	On
Vertical 72Hz NL, Horizontal 59.46	On	On

Continued on next page...

VGA CONFIGURABLE SETTING	
Monitor Timings	SW1/5
Vertical 60/70Hz, Horizontal 31.5Khz	Off
Vertical 75/88Hz, Horizontal 40Khz	On

ZERO WAIT STATE SELECT	
Purpose	JP1
Enabled	Closed
Disabled	Open

ADDRESS LATCH SELECT	
Purpose	JP2
Tied to VCC	Pins 1 & 2 closed
Tied to BUS	Pins 2 & 3 closed