# QDI COMPUTER, INC.
# TVGA-8900D

| | |
|---|---|
| Category | Video |
| Video Types Supported | XVGA |
| Video Processor | Trident Microsystems, Inc. |
| Highest Resolution Supported | 1024 x 768 |
| Data Bus Type | 16-bit ISA |
| Memory Type | DRAM |
| Maximum Onboard Memory | 1MB |



| CONNECTIONS | | | |
|---|---|---|---|
| Purpose | Location | Purpose | Location |
| 15-pin analog video port | CN1 | VESA Feature connector | CN2 |

| ZERO WAIT STATE | | |
|---|---|---|
| Setting | J1 | J2 |
| í Enabled | Open | Closed |
| Disabled | Closed | Open |

| SCAN RATE | |
|---|---|
| Setting | J7 |
| í Interlaced mode | Closed |
| Non-interlaced, 48.7KHz mode | Open |

| 8/16-BIT BIOS AUTODETECT FUNCTION | |
|---|---|
| Setting | J8 |
| í Disabled (8-bit rate selected) | Closed |
| Enabled | Open |
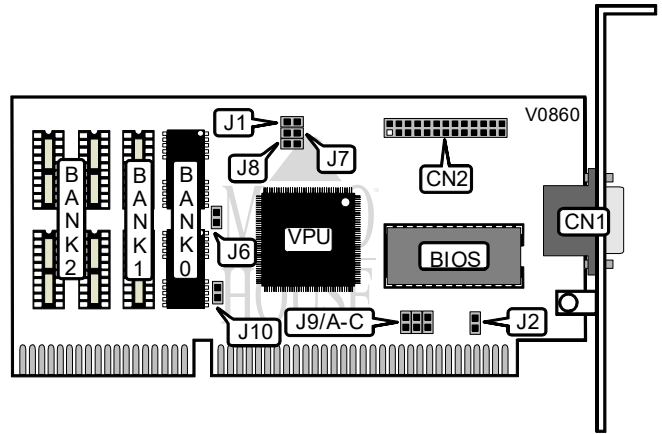
QDI COMPUTER, INC.
TVGA-8900D

| 8/16-BIT BUS SLOT INSTALLATION | | | | | |
|---|---|---|---|---|---|
| Setting | J6 | J10 | J9/jumper A | J9/jumper B | J9/jumper C |
| í 16-bit slot | Open | Closed | Open | Open | Open |
| 8-bit slot | Closed | Open | Closed | Closed | Closed |

| DRAM CONFIGURATION | | | |
|---|---|---|---|
| Size | B nk 0 | B nk 1 | B nk 2 |
| í 256KB | (2) 256K x 4 | None | None |
| 512KB | (2) 256K x 4 | (2) 256K x 4 | None |
| 1MB | (2) 256K x 4 | (2) 256K x 4 | (4) 256K x 4 |