


TURTLE BEACH SYSTEMS
TROPEZ

Card Type
Chipset/Controller
I/O Options

Maximum DRAM

Sound card
Unidentified
CD-ROM interface, game/MIDI port, audio line in/line-out, microphone jack,
speaker jack
12MB

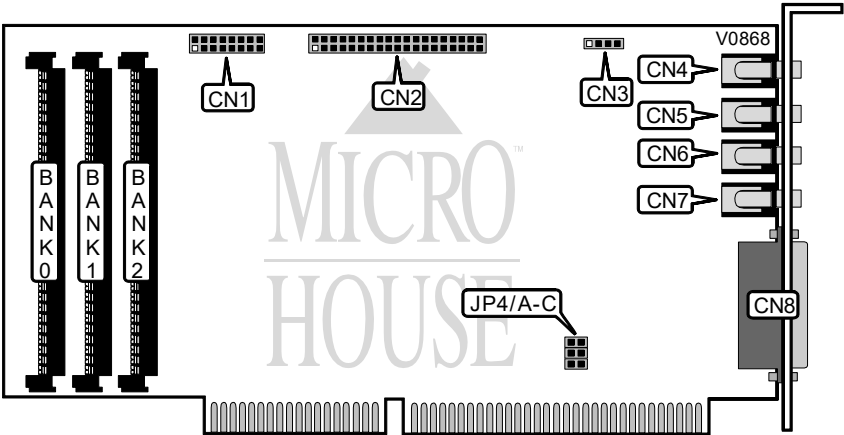

CONNECTIONS			
Purpos	Location	Purpose	Location
MIDI port - internal	CN1	Audio line-in jack	CN5
Enhanced IDE CD-ROM interface	CN2	Auxiliary audio line-in jack	CN6
CD-audio connector	CN3	Audio line-out jack	CN7
Microphone jack	CN4	Game/MIDI port	CN8

I/O ADDRESS - JP4			
I ddress	Jui per A	Jui per B	Jui per C
330h	Open	Open	Open
210h	Closed	Closed	Closed
230h	Open	Closed	Closed
260h	Closed	Open	Closed
290h	Open	Open	Closed
300h	Closed	Closed	Open
320h	Open	Closed	Open
338h	Closed	Open	Open

Continued on next page. . .

TURTLE BEACH SYSTEMS

TROPEZ

...continued from previous page

DRAM CONFIGURATION			
Size	B nk 0	B nk 1	B nk 2
í Disabled	None	None	None
256KB	(1) 256K x 9	None	None
512KB	(1) 256K x 9	(1) 256K x 9	None
768KB	(1) 256K x 9	(1) 256K x 9	(1) 256K x 9
1MB	(1) 1M X 9	None	None
1.25MB	(1) 1M X 9	(1) 256K x 9	None
1.50MB	(1) 1M X 9	(1) 256K x 9	(1) 256K x 9
2MB	(1) 1M X 9	(1) 1M X 9	None
2.25MB	(1) 1M X 9	(1) 1M X 9	(1) 256K x 9
3MB	(1) 1M X 9	(1) 1M X 9	(1) 1M X 9
4MB	(1) 4M x 9	None	None
4.25MB	(1) 4M x 9	(1) 256K x 9	None
4.50MB	(1) 4M x 9	(1) 256K x 9	(1) 256K x 9
5MB	(1) 4M x 9	(1) 1M X 9	None
5.25MB	(1) 4M x 9	(1) 1M X 9	(1) 256K x 9
6MB	(1) 4M x 9	(1) 1M X 9	(1) 1M X 9
8MB	(1) 4M x 9	(1) 4M x 9	None
8.25MB	(1) 4M x 9	(1) 4M x 9	(1) 256K x 9
9MB	(1) 4M x 9	(1) 4M x 9	(1) 1M X 9
12MB	(1) 4M x 9	(1) 4M x 9	(1) 4M x 9
Note: Banks 0-2 are interchangeable. They can be filled in any combination in any order with 70ns SIMMs.			