PIXELWORKS, INC.
ULTRA CLIPPER GRAPHICS UA1280 (7-SWITCH)

Category	Video
Video Types Supported	XVGA
Video Processor	Pixelworks, Inc.(exact location unidentified)
Highest Resolution Supported	1280 x 1024
Data Bus Type	16-bit ISA
Memory Type	DRAM
Maximum Onboard Memory	1.5MB
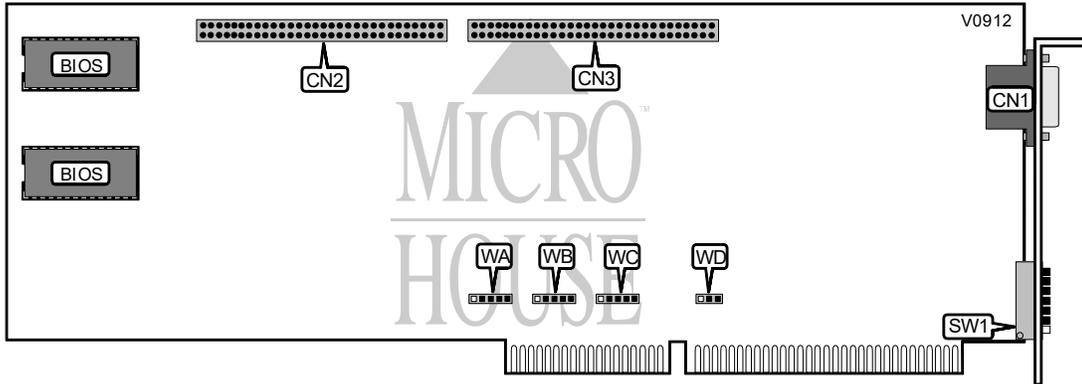
CONNECTIONS			
Purpose	**Location**	**Purpose**	**Location**
15-pin analog video port	CN1	Daughterboard connector	CN2 & CN3

BASE I/O ADDRESS SELECTION	
Address	WD
í 330h	Pins 1 & 2 closed
340	Pins 2 & 3 closed

DMA SELECTION		
Channel	WA	WB
í 6	Pins 1 & 2 closed	Pins 1 & 2 closed
5	Pins 4 & 5 closed	Pins 4 & 5 closed
7	Pins 2 & 3 closed	Pins 2 & 3 closed

INTERRUPT SELECTION	
IRQ	WC
í 10	Pins 1 & 2 closed
11	Pins 2 & 3 closed
12	Pins 4 & 5 closed

PIXELWORKS, INC.
ULTRA CLIPPER GRAPHICS UA1280 (7-SWITCH)

CGA EMULATION CONFIGURATION	
Setting	SW1/1
Enabled	On
Disabled	Off

FACTORY CONFIGURED - DO NOT ALTER	
Switch	Position
SW1/2	Off
SW1/3	Off
SW1/4	Off
SW1/5	On
SW1/6	Off
SW1/7	Off