


RELIALOGIC CORPORATION PRIVATE, LTD.
VP39C

Category	Video
Video Types Supported	XVGA
Video Processor	Trident 8900D
Highest Resolution Supported	1024 x 768
Data Bus Type	16-bit ISA
Memory Type	DRAM
Maximum Onboard Memory	1MB

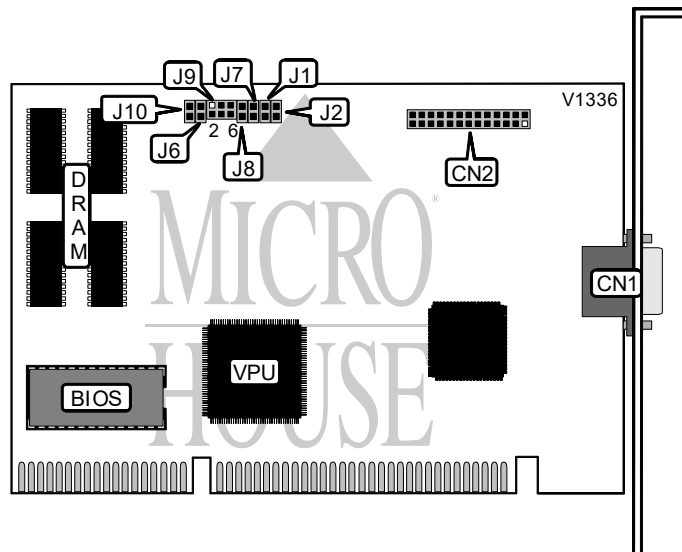

CONNECTIONS			
Purpose	Location	Purpose	Location
15-pin analog video port	CN1	VGA feature connector	CN2

FIRST ZERO WAIT STATE CONFIGURATION	
Setting	J2
Enabled	Closed
Disabled	Open

SECOND ZERO WAIT STATE CONFIGURATION	
Setting	J1
Enabled	Open
Disabled	Closed

Continued on next page . . .

RELIALOGIC CORPORATION PRIVATE, LTD.
VP39C

...continued from previous page

SCAN RATE MODE CONFIGURATION			
Mode		J7	
i Interlaced		Closed	
Non-interlaced		Open	

AUTODETECT CONFIGURATION	
Setting	
J8	
i Enabled	Open
Disabled	Closed

ISA BUS SLOT SELECTION			
3us	J6	J10	J9
16-bit	Open	Closed	Pins 1 & 2, 3 & 4, 5 & 6 open
8-bit	Closed	Open	Pins 1 & 2, 3 & 4, 5 & 6 closed