


MICRONICS COMPUTERS, INC.

MVC 9420 VL GRAPHICS

Category	Video
Video Types Supported	XVGA
Video Processor	Trident MVC9420
Highest Resolution Supported	1280 x 1024
Data Bus Type	32-bit Vesa Local Bus
Memory Type	DRAM
Maximum Onboard Memory	2MB

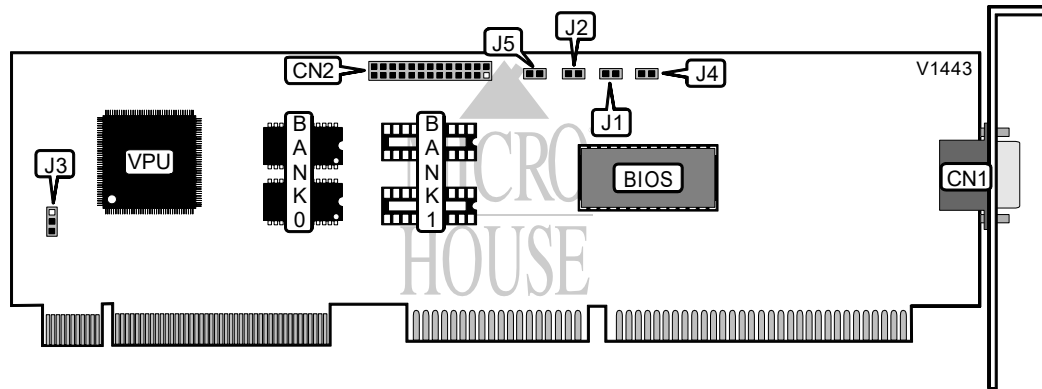

CONNECTIONS			
Purpose	Location	Purpose	Location
15-pin analog video port	CN1	VGA feature connector	CN2

VL-BUS SPEED CONFIGURATION	
Speed	J5
33MHz	Open
50MHz	Closed

VGA MODE CONFIGURATION	
Setting	J1
Non-interlaced	Open
Interlaced	Closed

DRAM CLOCK CONFIGURATION	
Setting	J2
Normal DRAM	Open
Add state machine CLK Rp	Closed

Continued on next page . . .

MICRONICS COMPUTERS, INC.
MVC 9420 VL GRAPHICS

...continued from previous page

DRAM CLOCK SPEED CONFIGURATION	
Speed	J4
Fast	Open
Slow	Closed

DRAM MEMORY CONFIGURATION		
Size	Bank 1	Bank 2
1MB	(2) 256K x 16	NONE
2MB	(2) 256K x 16	(2) 256K x 16

FACTORY CONFIGURED - DO NOT ALTER	
Jumper	Position
J3	Pins 1 & 2 closed