
## BEHAVIOR TECH COMPUTER CORPORATION 1515

Card Type Video Chip Set Highest Resolution Supported Maximum Video Memory Data Bus Video Types Supported

Video card Oak Technology 800 x 600 256KB DRAM 16-bit ISA VGA

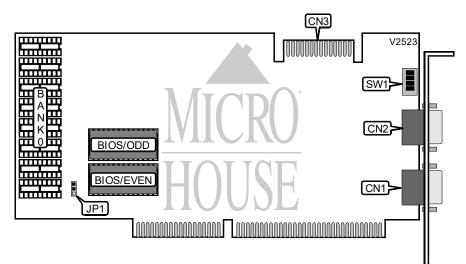

CONNECTIONS					
Function	Label	Function	Label		
9-pin digital video port	CN1	Feature connector	CN3		
15-pin analog video port	CN2				

USER CONFIGURABLE SETTINGS					
Function	Label	Position			
í 8-bit bus enabled	JP1	Pins 2 & 3 closed			
16-bit bus enabled	JP1	Pins 1 & 2 closed			

DRAM CONFIGURATION				
Size	Bank 0			
256KB	(8) 256K x 1			

Continued on next page. . .

## BEHAVIOR TECH COMPUTER CORPORATION 1515

... continued from previous page

DISPLAY CONFIGURATION							
Setting	SW1/1	SW1/2	SW1/3	SW1/4			
MDA	On	On	On	Off			
CGA	Off	On	On	Off			
EGA	On	Off	On	Off			
NEC Multisync	Off	Off	On	Off			
NEC Multisync Plus	On	On	Off	Off			
NEC Multisync 2A	Off	On	Off	Off			
NEC XL	On	Off	Off	Off			
NEC 4D OR 5D	On	Off	Off	On			
Reserved	Off	Off	Off	Off			
VGA (Mono)	Off	On	On	On			
VGA (Color)	On	Off	On	On			
VGA 16in. (Color)	Off	Off	On	On			
Reserved	N/A	N/A	Off	On			
Note: Only IBM VGA modes and 800 x 600 graphics modes are supported on NEC Multisync 2A monitors.							