


DTK COMPUTER. INC.

PTI-206A EGA PRINTER

Card Type	Parallel card, Video card
Video Chip Set	Unidentified
Highest Resolution Supported	720 x 350
Maximum Video Memory	256KB RAM (type unidentified)
Data Bus	8-bit ISA
Video Types Supported	EGA

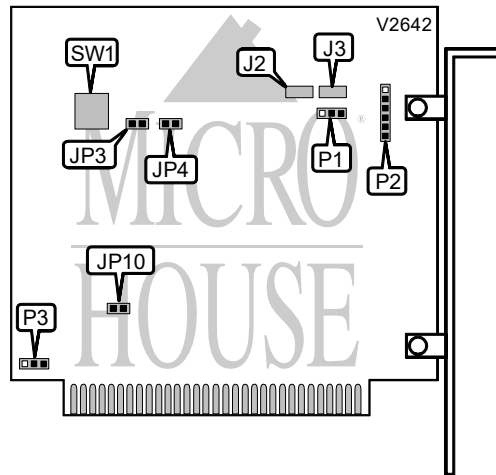

CONNECTIONS			
Function	Label	Function	Label
Feature connector	J4	25-pin parallel port	Location unidentified
Light Pen Interface	P2	9-pin digital video port	Location unidentified

USER CONFIGURABLE SETTINGS		
Function	Label	Position
í Secondary red output on pin 2 of the direct drive interface connector is for use of an enhanced color monitor	P1	Pins 1 & 2 closed
Pin 2 of the direct drive interface connector connected to the ground is for use of a color monitor	P1	Pins 2 & 3 closed
í EGA addresses selected at 3XX	P3	Pins 1 & 2 closed
EGA addresses selected at 2XX (not supported by BIOS)	P3	Pins 2 & 3 closed
í Factory configured - do not alter	SW1/5	On
í Factory configured - do not alter	SW1/6	On

PARALLEL PORT CONFIGURATION			
Setting	JP3	JP4	JP10
í LPT1	Closed	Closed	Open
LPT2	Open	Closed	Closed
Disabled	N/A	Open	N/A

Continued on next page. . .

DTK COMPUTER. INC.
PTI-206A EGA PRINTER

... continued from previous page

EGA ADAPTER CONFIGURATION (PRIMARY)						
Enhanced	Monochrome	Color	SW1/1	SW1/2	SW1/3	SW1/4
Color Display 40x25	Secondary	N/A	On	Off	Off	On
Color Display 80x25	Secondary	N/A	On	Off	Off	Off
Emulation mode	Secondary	N/A	Off	On	On	On
High Res. Mode	Secondary	N/A	Off	On	On	Off
Monochrome	N/A	Secondary 40x25	Off	On	Off	On
Monochrome	N/A	Secondary 80x25	Off	On	Off	Off

EGA ADAPTER CONFIGURATION (SECONDARY)						
Enhanced	Monochrome	Color	SW1/1	SW1/2	SW1/3	SW1/4
Color Display 40x25	Primary	N/A	On	On	On	On
Color Display 80x25	Primary	N/A	On	On	On	Off
Emulation mode	Primary	N/A	On	On	Off	On
High Res. Mode	Primary	N/A	On	On	Off	Off
Monochrome	N/A	Primary 40x25	On	Off	On	On
Monochrome	N/A	Primary 80x25	On	Off	On	Off

MISCELLANEOUS TECHNICAL NOTES

Note: The purpose of SW1/7 and SW1/8 is unidentified.