


SIIG, INC.

PARALLEL PRO (VER. 2)

Card Type	Parallel card
Chip Set	Unidentified
Maximum Onboard Memory	None
I/O Options	Parallel port
Data Bus	8/16-bit ISA
Floppy drives supported	None

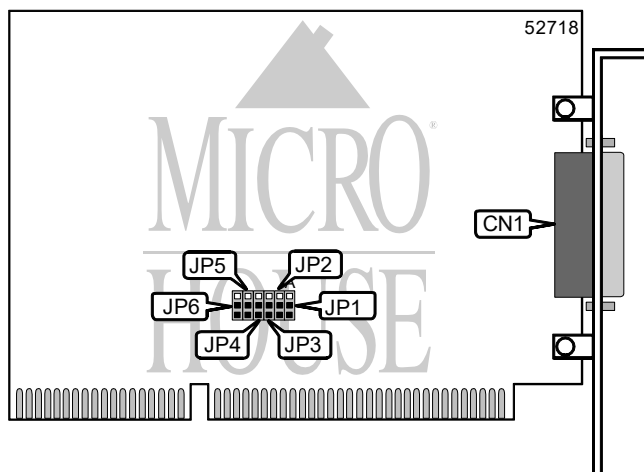

CONNECTIONS	
Function	Label
Parallel port	CN1

MODE CONFIGURATION		
Size	JP1	JP2
SPP/BPP	Pins 1 & 2 closed	Pins 1 & 2 closed
EPP	Pins 1 & 2 closed	Pins 2 & 3 closed
ECP	Pins 2 & 3 closed	Pins 1 & 2 closed
EPP/ECP	Pins 2 & 3 closed	Pins 2 & 3 closed

DMA CHANNEL SELECTION		
Channel	JP3	JP5
1	Pins 1 & 2 closed	Pins 1 & 2 closed
3	Pins 2 & 3 closed	Pins 2 & 3 closed

PARALLEL PORT ADDRESS SELECTION	
Setting	JP6
LPT1 (378h)	Pins 2 & 3 closed
LPT2 (278h)	Pins 1 & 2 closed

PARALLEL PORT INTERRUPT SELECTION	
IRQ	JP4
IRQ7	Pins 2 & 3 closed
IRQ5	Pins 1 & 2 closed