
## VIDEO SEVEN V7 VGA 1024I

CategoryVideoVideo Types SupportedXVGAVideo ProcessorHeadlandHighest Resolution1024 x 768Supported

Data Bus Type16-bit ISAMemory TypeDRAMMaximum Onboard Memory512KB

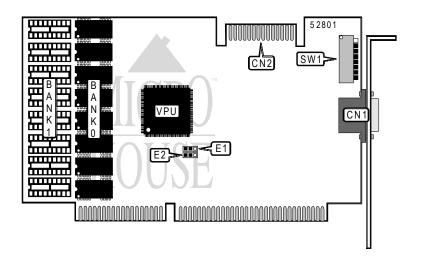

CONNECTIONS			
Purpos :	Location	Purpos ;	Location
15-pin analog video port	CN1	VGA Feature connector	CN2

FAST WRITE FEATURE CONFIGURATION		
Setting SW1/4		
í Enabled	On	
Disabled	Off	

FACTORY CONFIGURED - DO NOT ALTER		
Switch	Position	
SW1/1	On	
SW1/2	On	
SW1/3	On	

Continued on next page . . .

. . . continued from previous page

EMULATION MODE SELECTION		
Mode	SW1/5	
í Emulation enable	On	
CGA and HGC disabled	Off	

	BIOS ACCESS SEL	ECTION	
Setti g	E2	W1/6	W1/7
í 16-bit BIOS ROM access	Pins 1 & 2 closed	On	On
Force 8-bit ROM access	Pins 2 & 3 closed	Off	Off

VGA MODE SELECTION		
Setting	SW1/8	
í VGA 1024l extensions enabled	On	
Force VGA only modes	Off	

VIDEO INTERRUPT SELECTION		
IRQ 2/9	E1	
í Disabled	Pins 2 & 3 closed	
Enabled	Pins 1 & 2 closed	

FACTORY CONFIGURED - DO NOT ALTER		
Switch Position		
SW1/1	On	
SW1/2	On	
SW1/3	On	

DRAM CONFIGURATION		
Size	Bank (	Bank <sup>-</sup>
256KB	(8) 4864	None
512KB	(8) 4864	(8) 4864