
ACER, INC. P541

Card Type Video Chip Set Highest Resolution Supported Maximum Video Memory

Data Bus Video Types Supported

Video Formats Supported

MPEG decoder Unidentified 720 x 480 4MB DRAM 16-bit ISA **VGA** NTSC, PAL

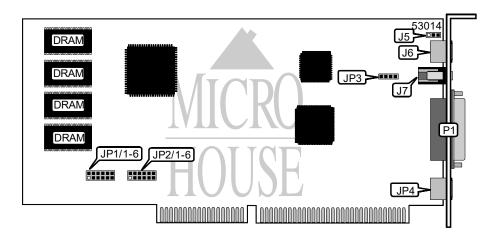

CONNECTIONS					
Function	Label	Function	Label		
IR connector	J5	15-pin analog video port	P1		
IR receiver connector	J6	Audio out (internal)	JP3		
Audio out (external)	J7	S-Video in/out	JP4		

USER CONFIGURABLE SETTINGS		
Function	Label	Position
í PnP enabled	JP2/1	Open
PnP disabled	JP2/1	Closed
í I/O address range 2B0H - 2BFH	JP2/2	Open
I/O address range 2COH - 2CFH	JP2/2	Closed

DMA CHANNEL SELECTION						
Channel	JP1/1	JP1/2	JP1/3	JP1/4	JP1/5	JP1/6
5	Open	Open	Open	Open	Closed	Closed
í 6	Open	Open	Closed	Closed	Open	Open
7	Closed	Closed	Open	Open	Open	Open

INTERRUPT SELECTION					
IRQ	JP2/3	JP2/4	JP2/5	JP2/6	
5	Open	Open	Open	Closed	
í 10	Open	Open	Closed	Open	
11	Open	Closed	Open	Open	
12	Closed	Open	Open	Open	