


MEDIA VISION TECHNOLOGY, INC.

PRO AUDIO STUDIO 16 (650-0060-02)

Card Type	Sound card
Chip Set	Unidentified
Maximum Onboard Memory	Unidentified
I/O Options	Game/MIDI port, CD-ROM audio in, SCSI interface, microphone in, stereo line in, stereo line out, speaker out
Data Bus	16-bit ISA

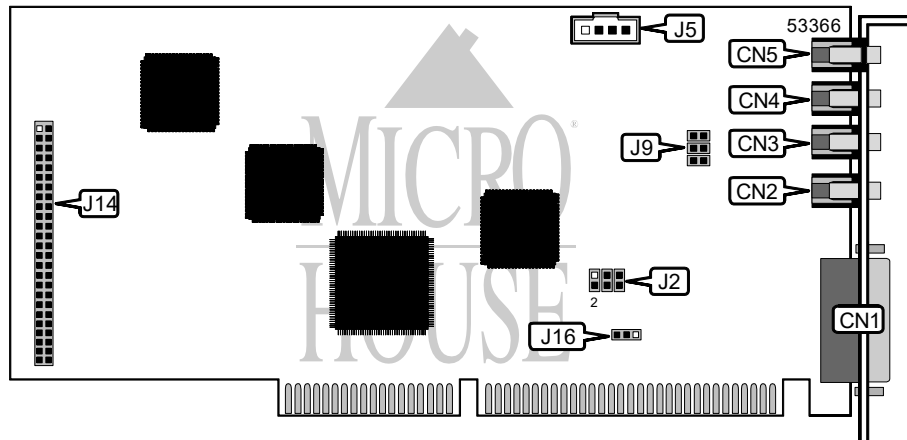

CONNECTIONS			
Function	Label	Function	Label
Game/MIDI port	CN1	Speaker out	CN5
Microphone in	CN2	Audio in - CD-ROM	J5
Stereo line in	CN3	50-pin SCSI connector	J14
Stereo line out	CN4		

USER CONFIGURABLE SETTINGS		
Function	Label	Position
í Factory configured - do not alter	J9	Unidentified
í DMA sharing - disabled	J16	Pins 2 & 3 closed
DMA sharing - enabled	J16	Pins 1 & 2 closed

BOARD ID SELECTION			
Setting	J2/pins 1 & 2	J2/pins 3 & 4	J2/pins 5 & 6
í 0	Open	Open	Open
1	Closed	Open	Open
2	Open	Closed	Open
3	Closed	Closed	Open
4	Open	Open	Closed
Note: When ID 4 is selected, the base I/O address is forced to 388h. For all other ID's the software scans for available settings. Refer to the manufacturer's documentation for possible settings.			